
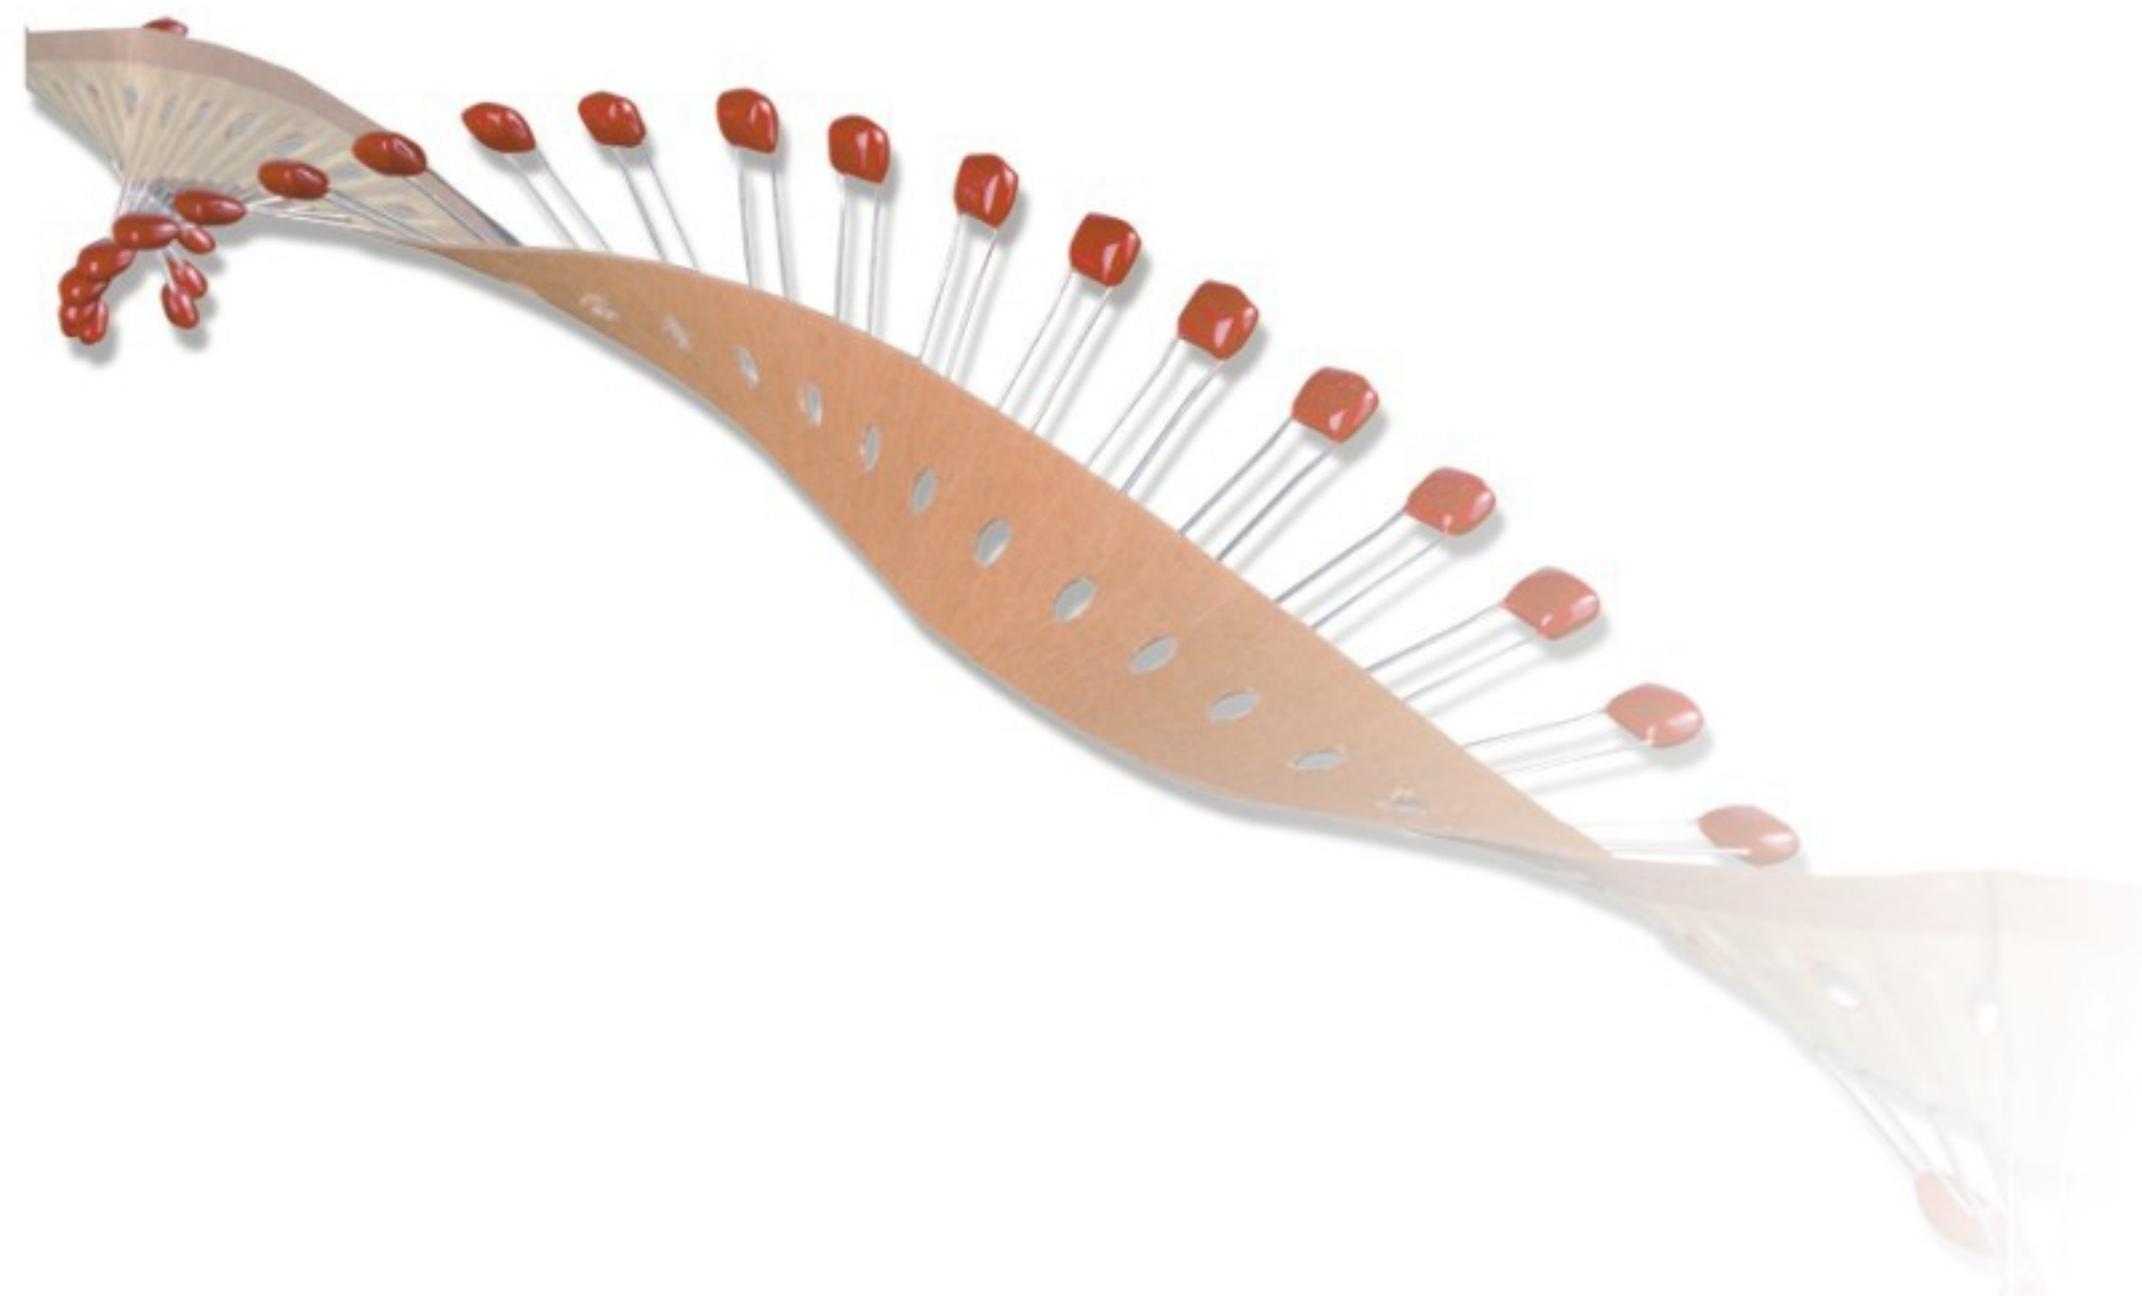


外觀圖 Outling Drawing

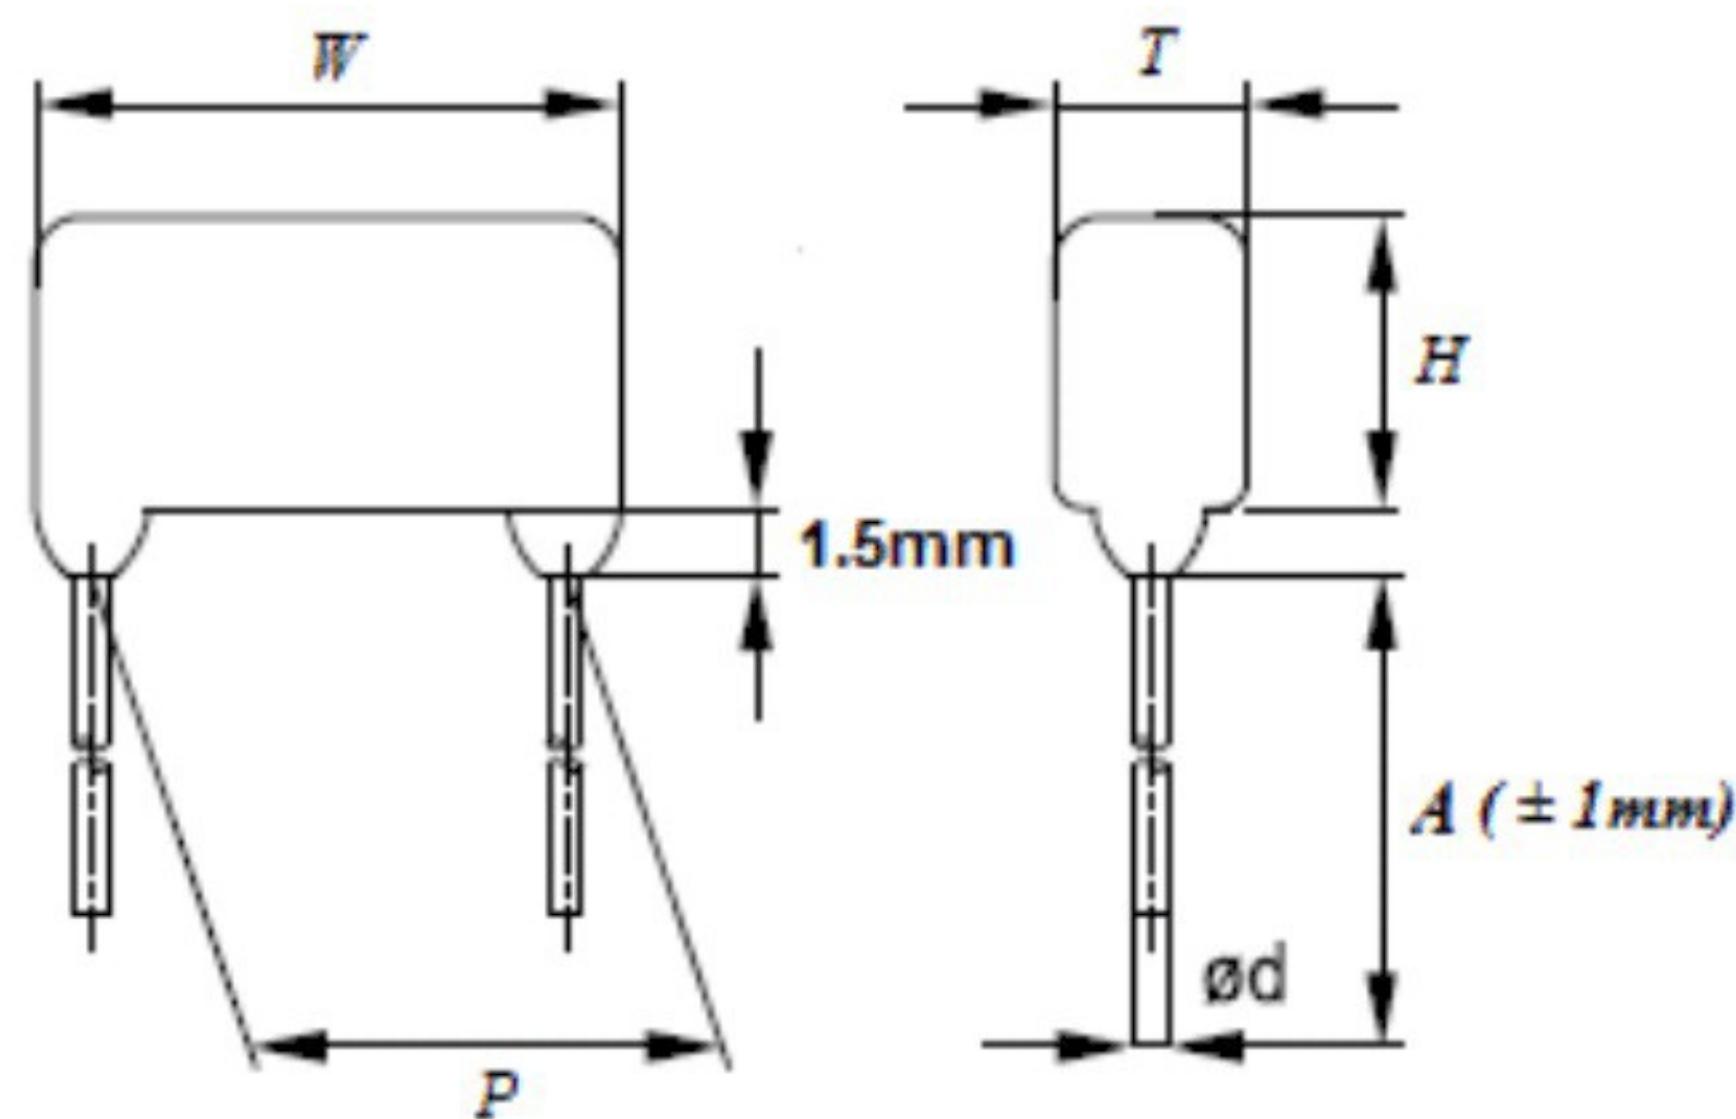

主要用途

旁路，隔直，耦合，退耦
脈衝，邏輯，定時，緊湊型節能燈
LCD監視器整流，汽車直流馬達抑制干擾

Typical Applications

By passing, Dlocking, Coupling, Decoupling
Pulse logic, Timing, Compact fluorescent lamps
Invert for LCD monitors, Automotive DC motor suppression

特點

金屬化聚酯薄膜，無感捲繞結構
阻燃性環氧樹脂包封
抗脈衝能力強

Features

Metalized polyester film, non-inductive wound construction
Flame retardant epoxy resin coating
High dV/dt ability

規格書 SPECIFICATION

引用標準 Reference Standard	GB/T 7332 (IEC 60384-2)	
氣候類別 Climatic Category	55/105/21	
工作溫度範圍 Operating Temperature Range	-40°C~+120°C (+85°C to +120°C: decreasing factor 1.25% per°C for UR)	
電容量範圍 Capacitance Range	0.001uF ~ 1.0uF	
額定電壓 Rated Voltage	63V, 100V, 250V,	
電容偏差 Capacitance Tolerance	± 5%(J)、± 10%(K)	
承受電壓 Voltage Proof	1.5UR (5s)	
損耗角 Dissipation Factor	$\leq 1.0\%$ (20°C, 1kHz)	
絕緣電阻 Insulation Resistance.	UR≤100V	CR ≤ 0.33uF IR ≥ 15,000MΩ CR > 0.33uF IR ≥ 5,000S

外型尺寸表 Dimension(mm)

63/100Vdc(63Vac)						250Vdc(140Vac)					
容量 μF	W	H	T	P	d	容量 μF	W	H	T	P	d
0.0010	7.3	7.5	4.5	5	0.5	0.0010	7.3	7.5	4.5	5	0.5
0.0015	7.3	7.5	4.5	5	0.5	0.0015	7.3	7.5	4.5	5	0.5
0.0022	7.3	7.5	4.5	5	0.5	0.0022	7.3	7.5	4.5	5	0.5
0.0033	7.3	7.5	4.5	5	0.5	0.0033	7.3	7.5	4.5	5	0.5
0.0047	7.3	7.5	4.5	5	0.5	0.0047	7.3	7.5	4.5	5	0.5
0.0068	7.3	7.5	4.5	5	0.5	0.0068	7.3	7.5	4.5	5	0.5
0.0082	7.3	7.5	4.5	5	0.5	0.0082	7.3	7.5	4.5	5	0.5
0.01	7.3	7.5	4.5	5	0.5	0.01	7.3	7.5	4.5	5	0.5
0.015	7.3	8	5	5	0.5	0.015	7.3	8	5	5	0.5
0.022	7.3	8	5	5	0.5	0.022	7.3	8	5	5	0.5
0.033	7.3	8	4.5	5	0.5	0.033	7.3	8	4.5	5	0.5
0.047	7.3	7.5	4.5	5	0.5	0.047	7.3	8	4.5	5	0.5
0.068	7.3	7.5	4.5	5	0.5	0.068	7.3	8.5	5	5	0.5
0.082	7.3	8	5	5	0.5	0.082	7.3	9	6	5	0.5
0.1	7.3	8.5	5.5	5	0.5	0.1	7.3	9.5	6.5	5	0.5
0.15	7.3	9	5.5	5	0.5	0.15	7.3	10	7	5	0.5
0.22	7.3	9	5.5	5	0.5	0.22	7.3	10.5	7	5	0.5
0.33	7.3	9	5.5	5	0.5						
0.39	7.3	9	5.5	5	0.5						
0.47	7.3	9.5	6	5	0.5						
0.68	7.3	10	6.5	5	0.5						
0.82	7.3	11	7	5	0.5						
1.0	7.3	12	7.5	5	0.5						