


RISW Series

Ignition Noise Suppression Resistor(Wirewound Type)

Specifications Per

• IEC 60115-1

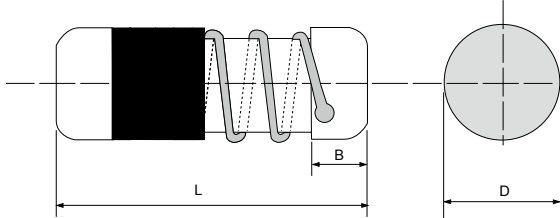

Features

- Dedicatedly designed for high-voltage spark ignition systems
- Enhanced weld spot is reliable against surge with long-term stability
- RoHS and REACH compliant

■ DIMENSIONS


Type	Body Length (L, mm)	Body Diameter (D, mm)	Cap Length (B, mm)
RISW35K	16.0 ± 1.0	4.5 ± 0.7	2.2 ± 0.3
RISW50K	18.5 ± 1.0	4.5 ± 0.7	2.2 ± 0.3
RISW50K1	22.5 ± 1.5	4.5 ± 0.7	2.2 ± 0.3

■ GENERAL SPECIFICATIONS

Type	Nominal Power Rating (at 70°C)	Maximum Working Voltage	Maximum Surge Load	Minimum Resistance	Maximum Resistance	Resistance Tolerance	Available Resistance Value
RISW35K	2W	350V	35KV / 20nS	1KΩ	3K3Ω	±5% ~ ± 20%	E-6/E-24
RISW50K	2W	400V	50KV / 20nS	1KΩ	4KΩ	±5% ~ ± 20%	E-6/E-24
RISW50K1	3W	450V	50KV / 30nS	1KΩ	5KΩ	±5% ~ ± 20%	E-6/E-24

Special sizes, values, and specifications not listed available on special order.

■ POWER DERATING CURVE

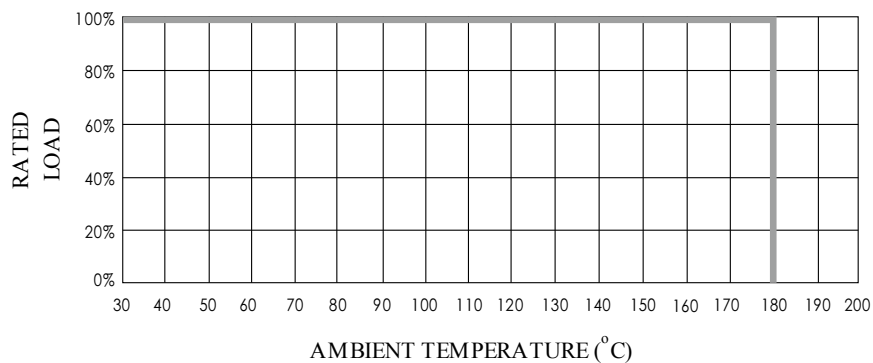

RISW Series

Ignition Noise Suppression Resistor(Wirewound Type)

■ TECHNICAL SPECIFICATIONS

Characteristics	Limits	
Dielectric Withstanding Voltage, VAC or DC	RISW35K RISW50K RISW50K1	500
Temperature Coefficient, PPM / °C*	±300	
Operating Temperature Range, °C	-40 ~ +180	
Insulation Resistance, MΩ	10 ⁴	
Inductance Range, 2 MHz, μH	5 to 50	

* Not applicable to all resistance values. Please check with us regarding the PPM of specific resistance value(s).

■ PERFORMANCE SPECIFICATIONS

Characteristics	Test Conditions	Limits
Short Time Overload	IEC 60115-1 4.13 5 seconds 2.5x rated voltage (not over 2X max. working voltage)	±2%
Load Life In Humidity	IEC 60115-1 4.24 56 days rated load (not over working voltage) at (40±2)°C and (93±3)% relative humidity	±5%
Load Life	IEC 60115-1 4.25.1 Rated load (not over working voltage) 1,000 hours with 1.5 hours ON, 0.5 hours OFF, at (70±2)°C	±5%
Vibration	IEC 60115-1 4.22 Six hours in each parallel and axial direction with a simple harmonic motion having an amplitude of 0.75mm and 10 to 500 Hz.	±5%
Thermal Endurance	IEC 60115-1 4.25.3 1,000 hours at 180°C without load	±5%
Thermal Shock	IEC 60115-1 4.19 -55°C 30minutes, +155°C 30minutes, 5 cycles	±3%
Surge Test	200,000 impacts at period 20ms (3000rpm/1hour) according to the following chart.	±5%


RISW Series

Ignition Noise Suppression Resistor(Wirewound Type)

■ SURGE TEST

Type	Circuit	Load	Period	Surges
RISW35K	35KV	30nS	20mS	200,000
RISW50K	50KV	30nS	20mS	200,000
RISW50K1	50KV	45nS	20mS	200,000

■ SURGE DIAGRAM

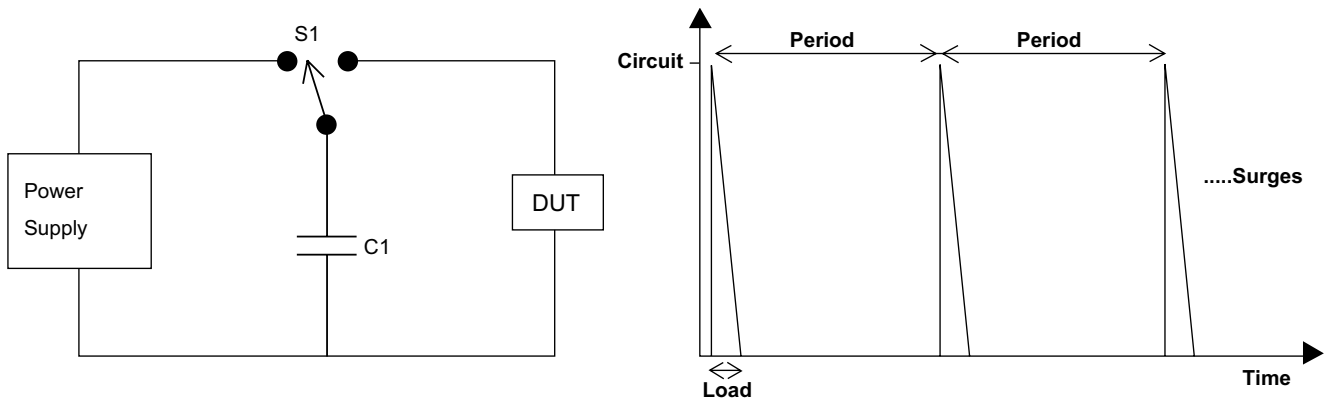

S1: High-voltage insulated switch

C1: High-voltage variable capacitor

Power supply: Variable 0 ~ 50KV DC

DUT: Device Under Test.

■ PART NUMBER

Example: **RISW35K2W2K2K300ppmNIL**

RISW35K	2W	2K2	K	300ppm	NIL
Type	Power	Resistance	Tolerance	TCR	Packaging
	2W	22R=22Ω 22K=22KΩ 1M=1MΩ R = 1 K = 10 ³ M = 10 ⁶ G = 10 ⁹	J (5%) K (10%) M (20%)	3-7-character code TYL=Typical ± 5 ppm=5ppm ± 1000ppm=1000ppm	Nil = Bulk T/R = Tape and Reel T/B = Tape and Box