

ALTERNATION HISTORY RECORDS 变更记录

| Date 日期 | Version 版本 | Mark 标记 | Page 页码 | Description 描述 | Drafter 制定者 | Approver 审批者 |
|--------------------|-----------------------|--------------------|--------------------|---------------------------|------------------------|-------------------------|
| 2021-07-07 | A | | 25 | Reissue | Doris | Emily |
| | | | | | | |

1. INTRODUCTION

Soft termination series MLCC is designed and with a polymer layer within end terminations of product, which can absorb mechanical stress caused by PCB handling in SMT line and reduce the mechanical impact for product. It will offer more robust and reliable performance in applications.

2. FEATURES

- a. MLCC's termination are with a soft & flexible polymer layer to withstand high bending stress in SMT line.
- b. Available for any item in standard series range.

3. APPLICATIONS

- a. Automotive industry.
- b. Power supply and related industries.
- c. Lighting industry.
- d. The other mechanical stress concerned products.


4. HOW TO ORDER

| <u>ST</u> | <u>0805</u> | <u>B</u> | <u>104</u> | <u>K</u> | <u>500</u> | <u>D</u> | <u>C</u> |
|-----------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------------------------------------------------|
| <u>Series</u> | <u>Size</u> | <u>Dielectric</u> | <u>Capacitance</u> | <u>Tolerance</u> | <u>Rated voltage</u> | <u>Thickness</u> | <u>Packing Q'TY</u> |
| ST=Soft Termination MLCC for Automotive | 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532) | N=NP0 (COG) B=X7R W=X5R F=Y5V | Two significant digits followed by no. of zeros. And R is in place of decimal point. Eg. 104=10x10 ⁴ =100nF | A=±0.05pF B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% | Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3=6.3 VDC 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC | Refer Item 5&7 | A:1K/Reel B:2K/Reel C:3K/Reel D:4K/Reel I:10K/Reel |

Note 1: Please see below product range to find right termination code.

5. EXTERNAL DIMENSIONS & CONSTRUCTIONS

| Size Inch (mm) | L (mm) | W (mm) | T (mm)/Symbol | Remark | M _B (mm) | |
|-------------------|---------------|-----------|---------------|--------|---------------------------|-----------|
| 0402 (1005) | 1.00±0.20 | 0.50±0.20 | 0.50±0.20 E | # | 0.25 +0.05/-0.10 | |
| 0603 (1608) | 1.60±0.20 | 0.80±0.10 | 0.80±0.07 S | | 0.40±0.15 | |
| | 1.60±0.30 | 0.80±0.30 | 0.80±0.30 X | | | |
| 0805 (2012) | 2.00±0.20 | 1.25±0.10 | 0.60±0.10 A | | 0.50±0.20 | |
| | | | 0.80±0.10 B | | | |
| | | | 1.25±0.10 D | # | | |
| | | | 1.25±0.30 I | # | | |
| 1206 (3216) | 3.20+0.4/-0.1 | 1.60±0.15 | 0.80±0.10 B | | 0.60±0.20 (0.50±0.25)* | |
| | | | 0.95±0.10 C | # | | |
| | | | 1.15±0.15 J | # | | |
| | | | 1.25±0.10 D | # | | |
| | 3.20+0.4/-0.1 | 1.60±0.20 | 1.60±0.20 G | # | | |
| | 3.20±0.50 | 1.60±0.50 | 1.60±0.50 P | # | | |
| 1210 (3225) | 3.20±0.40 | 2.50±0.20 | 0.95±0.10 C | # | 0.75±0.25 | |
| | | | 1.25±0.10 D | # | | |
| | 3.20±0.60 | 2.50±0.50 | 1.60±0.20 G | # | | |
| | | | 2.00±0.20 K | # | | |
| | | | 2.50±0.50 M | # | | |
| 1808 (4520) | 4.50+0.6/-0.4 | 2.03±0.25 | 1.25±0.10 D | # | 0.50±0.25 | |
| | | | 2.00±0.20 K | # | | |
| 1812 (4532) | 4.50+0.6/-0.4 | 3.20±0.30 | 1.25±0.10 D | # | 0.75±0.25 (0.50±0.25)* | |
| | | | 1.60±0.20 G | # | | |
| | | 3.20±0.40 | 2.00±0.20 K | # | | |
| | | | 2.50±0.50 M | # | | |
| 1825 (4563) | 4.50+0.6/-0.4 | 6.30±0.40 | 2.00±0.20 (K) | | # | 0.75±0.35 |
| 2220 (5750) | 5.70±0.50 | 5.00±0.40 | 2.50±0.30 (M) | | # | 0.85±0.35 |
| 2225 (5763) | 5.70±0.50 | 6.30±0.40 | 2.80±0.30 (U) | | # | 0.85±0.35 |

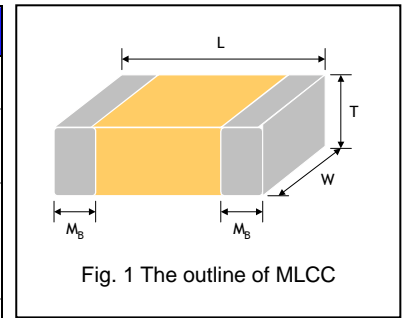

Reflow soldering only is recommended.

* For 1206 ≥ 1000V, 1812_200V~4000V products.

6. GENERAL ELECTRICAL DATA

| Dielectric | NP0 | X7R | X5R | Y5V |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------|-----------------|
| Size | 0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225 | | | |
| Capacitance range* | 0.1pF to 0.1μF | 100pF to 47μF | 0.033μF to 10μF | 0.01μF to 2.2μF |
| Capacitance tolerance** | Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%) | K (±10%), M (±20%) | | Z (-20/+80%) |
| Rated voltage (WVDC) | 6.3V to 3000V | | | |
| Operating temperature | -55 to +125℃ | -55 to +125℃ | -55 to +85℃ | -25 to +85 ℃ |
| Capacitance characteristic | ±30ppm | ±15% | ±15% | +30/-80% |
| Termination | Ni/Sn (lead-free termination) | | | |

* Measured at the condition of 30~70% related humidity.

NP0: Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap>1000pF, 25℃ at ambient temperature

X7R, X5R: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25℃ ambient temperature.

Y5V: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 20℃ ambient temperature.

** Preconditioning for Class II MLCC: Perform a heat treatment at 150±10℃ for 1 hour, then leave in a mbient condition for 24±2 hours before measurement.

7. CAPACITANCE RANGE (NP0 Dielectric)

NP0 Dielectric 0402, 0603 Sizes

| DIELECTRIC | | NP0 | | | | | | | | | | | |
|---------------------|-------------|------|----|----|----|-----|------|----|----|----|-----|-----|-----|
| SIZE | | 0402 | | | | | 0603 | | | | | | |
| RATED VOLTAGE (VDC) | | 10 | 16 | 25 | 50 | 100 | 10 | 16 | 25 | 50 | 100 | 200 | 250 |
| Capacitance | 0.1pF (0R1) | E | E | E | E | | | | | | | | |
| | 0.2pF (0R2) | E | E | E | E | | | | | | | | |
| | 0.3pF (0R3) | E | E | E | E | | S | S | S | S | | | |
| | 0.4pF (0R4) | E | E | E | E | | S | S | S | S | | | |
| | 0.5pF (0R5) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 0.6pF (0R6) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 0.7pF (0R7) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 0.8pF (0R8) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 0.9pF (0R9) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 1.0pF (1R0) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 1.2pF (1R2) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 1.5pF (1R5) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 1.8pF (1R8) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 2.2pF (2R2) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 2.7pF (2R7) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 3.3pF (3R3) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 3.9pF (3R9) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 4.7pF (4R7) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 5.6pF (5R6) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 6.8pF (6R8) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 8.2pF (8R2) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 10pF (100) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 12pF (120) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 15pF (150) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 18pF (180) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 22pF (220) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 27pF (270) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 33pF (330) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 39pF (390) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 47pF (470) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 56pF (560) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 68pF (680) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 82pF (820) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 100pF (101) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 120pF (121) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 150pF (151) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 180pF (181) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 220pF (221) | E | E | E | E | E | S | S | S | S | S | S | S |
| | 270pF (271) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 330pF (331) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 390pF (391) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 470pF (471) | E | E | E | E | E | S | S | S | S | S | X | X |
| 560pF (561) | E | E | E | E | E | S | S | S | S | S | | | |
| 680pF (681) | E | E | E | E | E | S | S | S | S | S | | | |
| 820pF (821) | E | E | E | E | E | S | S | S | S | S | | | |
| 1,000pF (102) | E | E | E | E | E | S | S | S | S | S | | | |
| 1,200pF (122) | | | | | | X | X | X | X | | | | |
| 1,500pF (152) | | | | | | X | X | X | X | | | | |
| 1,800pF (182) | | | | | | X | X | X | X | | | | |
| 2,200pF (222) | | | | | | X | X | X | X | | | | |
| 2,700pF (272) | | | | | | X | X | X | X | | | | |
| 3,300pF (332) | | | | | | X | X | X | X | | | | |
| 3,900pF (392) | | | | | | | | | | | | | |
| 4,700pF (472) | | | | | | | | | | | | | |
| 5,600pF (562) | | | | | | | | | | | | | |
| 6,800pF (682) | | | | | | | | | | | | | |
| 8,200pF (822) | | | | | | | | | | | | | |
| 0.010uF (103) | | | | | | | | | | | | | |
| 0.012uF (123) | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

NP0 Dielectric 0805 Size

| DIELECTRIC | | NP0 | | | | | | | | | |
|---------------------|---------------|------|----|----|----|-----|-----|-----|-----|-----|------|
| SIZE | | 0805 | | | | | | | | | |
| RATED VOLTAGE (VDC) | | 10 | 16 | 25 | 50 | 100 | 200 | 250 | 500 | 630 | 1000 |
| Capacitance | 0.5pF (0R5) | A | A | A | A | A | A | A | A | A | D |
| | 0.6pF (0R6) | A | A | A | A | A | A | A | A | A | D |
| | 0.7pF (0R7) | A | A | A | A | A | A | A | A | A | D |
| | 0.8pF (0R8) | A | A | A | A | A | A | A | A | A | D |
| | 0.9pF (0R9) | A | A | A | A | A | A | A | A | A | D |
| | 1.0pF (1R0) | A | A | A | A | A | A | A | A | A | D |
| | 1.2pF (1R2) | A | A | A | A | A | A | A | A | A | D |
| | 1.5pF (1R5) | A | A | A | A | A | A | A | A | A | D |
| | 1.8pF (1R8) | A | A | A | A | A | A | A | A | A | D |
| | 2.2pF (2R2) | A | A | A | A | A | A | A | A | A | D |
| | 2.7pF (2R7) | A | A | A | A | A | A | A | A | A | D |
| | 3.3pF (3R3) | A | A | A | A | A | A | A | A | A | D |
| | 3.9pF (3R9) | A | A | A | A | A | A | A | A | A | D |
| | 4.7pF (4R7) | A | A | A | A | A | A | A | A | A | D |
| | 5.6pF (5R6) | A | A | A | A | A | A | A | A | A | D |
| | 6.8pF (6R8) | A | A | A | A | A | A | A | A | A | D |
| | 8.2pF (8R2) | A | A | A | A | A | A | A | A | A | D |
| | 10pF (100) | A | A | A | A | A | A | A | A | A | D |
| | 12pF (120) | A | A | A | A | A | A | A | A | A | D |
| | 15pF (150) | A | A | A | A | A | A | A | A | A | D |
| | 18pF (180) | A | A | A | A | A | A | A | A | A | D |
| | 22pF (220) | A | A | A | A | A | A | A | A | A | D |
| | 27pF (270) | A | A | A | A | A | A | A | A | A | D |
| | 33pF (330) | A | A | A | A | A | A | A | A | A | D |
| | 39pF (390) | A | A | A | A | A | A | A | A | A | D |
| | 47pF (470) | A | A | A | A | A | A | A | A | A | D |
| | 56pF (560) | A | A | A | A | A | A | A | A | A | D |
| | 68pF (680) | A | A | A | A | A | A | A | A | A | D |
| | 82pF (820) | A | A | A | A | A | A | A | B | B | D |
| | 100pF (101) | A | A | A | A | A | A | A | B | B | D |
| | 120pF (121) | A | A | A | A | A | A | B | D | D | D |
| | 150pF (151) | A | A | A | A | A | B | D | D | D | D |
| | 180pF (181) | A | A | A | A | A | B | D | D | D | D |
| | 220pF (221) | A | A | A | A | A | D | D | D | D | D |
| | 270pF (271) | A | A | A | A | A | D | D | D | D | D |
| | 330pF (331) | A | A | A | A | A | D | D | D | D | D |
| | 390pF (391) | B | B | B | B | B | D | D | D | D | D |
| | 470pF (471) | B | B | B | B | B | D | D | I | I | |
| | 560pF (561) | B | B | B | B | B | D | D | I | I | |
| | 680pF (681) | B | B | B | B | B | D | D | I | I | |
| | 820pF (821) | B | B | B | B | B | D | D | I | I | |
| | 1,000pF (102) | B | B | B | B | B | D | D | I | I | |
| | 1,200pF (122) | B | B | B | B | B | D | D | | | |
| | 1,500pF (152) | B | B | B | B | B | D | D | | | |
| | 1,800pF (182) | B | B | B | B | B | D | D | | | |
| 2,200pF (222) | B | B | B | B | B | D | D | | | | |
| 2,700pF (272) | D | D | D | D | D | | | | | | |
| 3,300pF (332) | D | D | D | D | D | | | | | | |
| 3,900pF (392) | D | D | D | D | D | | | | | | |
| 4,700pF (472) | D | D | D | D | D | | | | | | |
| 5,600pF (562) | D | D | D | D | D | | | | | | |
| 6,800pF (682) | D | D | D | D | D | | | | | | |
| 8,200pF (822) | D | D | D | D | D | | | | | | |
| 0.010μF (103) | D | D | D | D | D | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

NP0 Dielectric 1206 Size

| DIELECTRIC | | NP0 | | | | | | | | | | | |
|---------------------|-------------|------|----|----|----|-----|-----|-----|-----|-----|------|------|------|
| SIZE | | 1206 | | | | | | | | | | | |
| RATED VOLTAGE (VDC) | | 10 | 16 | 25 | 50 | 100 | 200 | 250 | 500 | 630 | 1000 | 1500 | 2000 |
| Capacitance | 1.0pF (1R0) | | | | | | | | | | | | |
| | 1.2pF (1R2) | B | B | B | B | B | | | | | | | |
| | 1.5pF (1R5) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 1.8pF (1R8) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 2.2pF (2R2) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 2.7pF (2R7) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 3.3pF (3R3) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 3.9pF (3R9) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 4.7pF (4R7) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 5.6pF (5R6) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 6.8pF (6R8) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 8.2pF (8R2) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 10pF (100) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 12pF (120) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 15pF (150) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 18pF (180) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 22pF (220) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 27pF (270) | B | B | B | B | B | B | B | B | B | B | B | B |
| | 33pF (330) | B | B | B | B | B | B | B | B | B | B | C | C |
| | 39pF (390) | B | B | B | B | B | B | B | B | B | B | C | C |
| | 47pF (470) | B | B | B | B | B | B | B | B | B | C | C | C |
| | 56pF (560) | B | B | B | B | B | B | B | B | B | C | D | D |
| | 68pF (680) | B | B | B | B | B | B | B | B | B | C | D | D |
| | 82pF (820) | B | B | B | B | B | B | B | B | B | D | D | D |
| | 100pF (101) | B | B | B | B | B | B | B | B | B | D | D | D |
| | 120pF (121) | B | B | B | B | B | B | B | B | B | D | G | G |
| | 150pF (151) | B | B | B | B | B | B | B | B | B | D | G | G |
| | 180pF (181) | B | B | B | B | B | B | B | B | B | G | G | G |
| | 220pF (221) | B | B | B | B | B | B | B | B | B | G | G | G |
| | 270pF (271) | B | B | B | B | B | B | C | C | C | G | P | P |
| | 330pF (331) | B | B | B | B | B | B | C | C | C | G | P | P |
| | 390pF (391) | B | B | B | B | B | B | C | C | C | G | P | P |
| | 470pF (471) | B | B | B | B | B | C | C | C | C | G | | |
| | 560pF (561) | B | B | B | B | B | C | D | D | D | G | | |
| 680pF (681) | B | B | B | B | B | C | D | D | D | G | | | |
| 820pF (821) | B | B | B | B | B | C | G | G | G | G | | | |
| 1,000pF (102) | B | B | B | B | B | C | G | G | G | G | | | |
| 1,200pF (122) | B | B | B | B | B | C | G | G | G | | | | |
| 1,500pF (152) | B | B | B | B | B | D | G | G | G | | | | |
| 1,800pF (182) | B | B | B | B | B | D | G | G | G | | | | |
| 2,200pF (222) | B | B | B | B | B | D | G | G | G | | | | |
| 2,700pF (272) | B | B | B | B | B | D | G | G | G | | | | |
| 3,300pF (332) | B | B | B | B | B | D | G | G | G | | | | |
| 3,900pF (392) | B | B | B | B | B | D | G | G | G | | | | |
| 4,700pF (472) | B | B | B | B | B | D | G | G | G | | | | |
| 5,600pF (562) | B | B | B | B | B | | | | | | | | |
| 6,800pF (682) | C | C | C | C | C | | | | | | | | |
| 8,200pF (822) | D | D | D | D | D | | | | | | | | |
| 0.010μF (103) | D | D | D | D | D | | | | | | | | |
| 0.012μF (123) | P | P | P | P | P | | | | | | | | |
| 0.015μF (153) | P | P | P | P | P | | | | | | | | |
| 0.018μF (183) | P | P | P | P | P | | | | | | | | |
| 0.022μF (223) | P | P | P | P | P | | | | | | | | |
| 0.027μF (273) | P | P | P | P | | | | | | | | | |
| 0.033μF (333) | P | P | P | P | | | | | | | | | |
| 0.039μF (393) | P | P | P | P | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact local representative.

NP0 Dielectric 1210 Size

| DIELECTRIC | | NP0 | | | | | | | | | | | |
|---------------------|---------------|------|----|----|----|-----|-----|-----|-----|-----|------|------|------|
| SIZE | | 1210 | | | | | | | | | | | |
| RATED VOLTAGE (VDC) | | 10 | 16 | 25 | 50 | 100 | 200 | 250 | 500 | 630 | 1000 | 1500 | 2000 |
| Capacitance | 10pF (100) | C | C | C | C | C | C | C | C | C | C | C | C |
| | 12pF (120) | C | C | C | C | C | C | C | C | C | C | C | C |
| | 15pF (150) | C | C | C | C | C | C | C | C | C | C | C | C |
| | 18pF (180) | C | C | C | C | C | C | C | C | C | C | C | C |
| | 22pF (220) | C | C | C | C | C | C | C | C | C | C | C | C |
| | 27pF (270) | C | C | C | C | C | C | C | C | C | C | C | C |
| | 33pF (330) | C | C | C | C | C | C | C | C | C | C | C | C |
| | 39pF (390) | C | C | C | C | C | C | C | C | C | C | C | C |
| | 47pF (470) | C | C | C | C | C | C | C | C | C | C | C | C |
| | 56pF (560) | C | C | C | C | C | C | C | C | C | C | D | D |
| | 68pF (680) | C | C | C | C | C | C | C | C | C | C | D | D |
| | 82pF (820) | C | C | C | C | C | C | C | C | C | C | D | D |
| | 100pF (101) | C | C | C | C | C | C | C | C | C | C | D | D |
| | 120pF (121) | C | C | C | C | C | C | C | C | C | D | D | D |
| | 150pF (151) | C | C | C | C | C | C | C | C | C | D | G | G |
| | 180pF (181) | C | C | C | C | C | C | C | C | C | D | G | G |
| | 220pF (221) | C | C | C | C | C | C | C | C | C | G | G | G |
| | 270pF (271) | C | C | C | C | C | C | C | C | C | G | K | K |
| | 330pF (331) | C | C | C | C | C | C | C | C | C | G | K | K |
| | 390pF (391) | C | C | C | C | C | C | C | C | C | G | M | M |
| | 470pF (471) | C | C | C | C | C | C | C | C | C | G | M | M |
| | 560pF (561) | C | C | C | C | C | C | C | C | C | G | | |
| | 680pF (681) | C | C | C | C | C | C | C | C | C | G | | |
| | 820pF (821) | C | C | C | C | C | C | C | C | C | G | | |
| | 1,000pF (102) | C | C | C | C | C | D | D | D | D | G | | |
| | 1,200pF (122) | C | C | C | C | C | D | D | D | D | G | | |
| | 1,500pF (152) | C | C | C | C | C | D | D | D | D | K | | |
| | 1,800pF (182) | C | C | C | C | C | D | D | D | D | M | | |
| | 2,200pF (222) | C | C | C | C | C | D | D | D | D | M | | |
| | 2,700pF (272) | C | C | C | C | C | D | D | D | D | M | | |
| | 3,300pF (332) | C | C | C | C | C | D | D | D | D | M | | |
| | 3,900pF (392) | C | C | C | C | C | D | D | D | D | M | | |
| | 4,700pF (472) | C | C | C | C | C | G | G | | | | | |
| | 5,600pF (562) | C | C | C | C | C | G | G | | | | | |
| | 6,800pF (682) | C | C | C | C | C | G | G | | | | | |
| | 8,200pF (822) | C | C | C | C | C | G | G | | | | | |
| | 0.010μF (103) | C | C | C | C | C | G | G | | | | | |
| | 0.012μF (123) | D | D | D | D | D | | | | | | | |
| | 0.015μF (153) | D | D | D | D | D | | | | | | | |
| | 0.018μF (183) | | | | | | | | | | | | |
| 0.022μF (223) | | | | | | | | | | | | | |
| 0.027μF (273) | | | | | | | | | | | | | |
| 0.033μF (333) | | | | | | | | | | | | | |
| 0.039μF (393) | | | | | | | | | | | | | |
| 0.047μF (473) | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

NP0 Dielectric 1808 Size

| DIELECTRIC | | NP0 | | | | | |
|---------------------|-------------|------|-----|------|------|------|------|
| SIZE | | 1808 | | | | | |
| RATED VOLTAGE (VDC) | | 500 | 630 | 1000 | 1500 | 2000 | 3000 |
| Capacitance | 2.0pF (2R0) | | | | | | |
| | 2.2pF (2R2) | D | D | D | D | D | D |
| | 2.7pF (2R7) | D | D | D | D | D | D |
| | 3.3pF (3R3) | D | D | D | D | D | D |
| | 3.9pF (3R9) | D | D | D | D | D | D |
| | 4.7pF (4R7) | D | D | D | D | D | D |
| | 5.6pF (5R6) | D | D | D | D | D | D |
| | 6.8pF (6R8) | D | D | D | D | D | D |
| | 8.2pF (8R2) | D | D | D | D | D | D |
| | 10pF (100) | D | D | D | D | D | D |
| | 12pF (120) | D | D | D | D | D | D |
| | 15pF (150) | D | D | D | D | D | D |
| | 18pF (180) | D | D | D | D | D | D |
| | 22pF (220) | D | D | D | D | D | D |
| | 27pF (270) | D | D | D | D | D | D |
| | 33pF (330) | D | D | D | D | D | D |
| | 39pF (390) | D | D | D | D | D | D |
| | 47pF (470) | D | D | D | D | D | D |
| | 56pF (560) | D | D | D | D | D | D |
| | 68pF (680) | D | D | D | D | D | D |
| | 82pF (820) | D | D | D | D | D | D |
| | 100pF (101) | D | D | D | D | D | K |
| | 120pF (121) | D | D | D | D | D | K |
| | 150pF (151) | D | D | D | K | K | K |
| | 180pF (181) | D | D | D | K | K | K |
| | 220pF (221) | D | D | D | K | K | K |
| | 270pF (271) | K | K | K | K | K | K |
| | 330pF (331) | K | K | K | K | K | K |
| | 390pF (391) | K | K | K | K | K | K |
| | 470pF (471) | K | K | K | K | K | |
| | 560pF (561) | K | K | K | K | K | |
| | 680pF (681) | K | K | K | K | K | |
| 820pF (821) | K | K | K | D | D | | |
| 1,000pF (102) | K | K | K | G | G | | |
| 1,200pF (122) | K | K | G | | | | |
| 1,500pF (152) | K | K | G | | | | |
| 1,800pF (182) | K | K | K | | | | |
| 2,200pF (222) | K | K | K | | | | |
| 2,700pF (272) | K | K | | | | | |
| 3,300pF (332) | K | K | | | | | |
| 3,900pF (392) | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

NP0 Dielectric 1812 Size

| DIELECTRIC | | NP0 | | | | | | | | | | | | |
|---------------------|---------------|------|----|----|----|-----|-----|-----|-----|-----|------|------|------|------|
| SIZE | | 1812 | | | | | | | | | | | | |
| RATED VOLTAGE (VDC) | | 10 | 16 | 25 | 50 | 100 | 200 | 250 | 500 | 630 | 1000 | 1500 | 2000 | 3000 |
| Capacitance | 10pF (100) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 12pF (120) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 15pF (150) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 18pF (180) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 22pF (220) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 27pF (270) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 33pF (330) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 39pF (390) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 47pF (470) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 56pF (560) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 68pF (680) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 82pF (820) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 100pF (101) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 120pF (121) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 150pF (151) | D | D | D | D | D | D | D | D | D | D | D | D | D |
| | 180pF (181) | D | D | D | D | D | D | D | D | D | D | D | D | K |
| | 220pF (221) | D | D | D | D | D | D | D | D | D | D | D | D | K |
| | 270pF (271) | D | D | D | D | D | D | D | D | D | D | K | K | K |
| | 330pF (331) | D | D | D | D | D | D | D | D | D | D | K | K | K |
| | 390pF (391) | D | D | D | D | D | D | D | D | D | D | K | K | K |
| | 470pF (471) | D | D | D | D | D | D | D | D | D | K | K | K | K |
| | 560pF (561) | D | D | D | D | D | D | D | D | D | K | K | K | |
| | 680pF (681) | D | D | D | D | D | D | D | D | D | K | K | K | |
| | 820pF (821) | D | D | D | D | D | D | D | D | D | K | K | K | |
| | 1,000pF (102) | D | D | D | D | D | D | D | D | D | K | K | K | |
| | 1,200pF (122) | D | D | D | D | D | D | D | D | D | K | | | |
| | 1,500pF (152) | D | D | D | D | D | D | D | D | D | K | | | |
| | 1,800pF (182) | D | D | D | D | D | D | D | D | D | K | | | |
| | 2,200pF (222) | D | D | D | D | D | D | D | D | D | K | | | |
| | 2,700pF (272) | D | D | D | D | D | D | D | D | D | K | | | |
| | 3,300pF (332) | D | D | D | D | D | D | D | D | D | K | | | |
| | 3,900pF (392) | D | D | D | D | D | D | D | D | D | M | | | |
| | 4,700pF (472) | D | D | D | D | D | D | D | D | D | | | | |
| | 5,600pF (562) | D | D | D | D | D | D | D | D | D | | | | |
| | 6,800pF (682) | D | D | D | D | D | D | D | D | D | | | | |
| 8,200pF (822) | D | D | D | D | D | | | D | D | | | | | |
| 0.010μF (103) | D | D | D | D | D | | | D | D | | | | | |
| 0.012μF (123) | D | D | D | D | D | | | | G | G | | | | |
| 0.015μF (153) | D | D | D | D | D | | | | G | G | | | | |
| 0.018μF (183) | D | D | D | D | D | | | | K | K | | | | |
| 0.022μF (223) | D | D | D | D | D | | | | K | K | | | | |
| 0.027μF (273) | D | D | D | D | D | | | | | | | | | |
| 0.033μF (333) | D | D | D | D | D | | | | | | | | | |
| 0.039μF (393) | | | | | | | | | | | | | | |
| 0.047μF (473) | | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

NP0 Dielectric 1825 to 2225 Sizes

| DIELECTRIC | NP0 | | | | | | | | | | | | | | | | | | | |
|---------------|---------------------|------|------------|------------|------|------|------|------|------------|-----|-----|------|------|------|-----|------------|-----|-----|------|------|
| | SIZE | 1825 | | | | | | 2220 | | | | | | 2225 | | | | | | |
| | RATED VOLTAGE (VDC) | 100 | 200 250 | 500 630 | 1000 | 2000 | 3000 | 100 | 200 250 | 500 | 630 | 1000 | 2000 | 3000 | 100 | 200 250 | 500 | 630 | 1000 | 2000 |
| Capacitance | 10pF (100) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 12pF (120) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 15pF (150) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 18pF (180) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 22pF (220) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 27pF (270) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 33pF (330) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 39pF (390) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 47pF (470) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 56pF (560) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 68pF (680) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 82pF (820) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 100pF (101) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 120pF (121) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 150pF (151) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 180pF (181) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 220pF (221) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 270pF (271) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 330pF (331) | K | K | K | K | K | K | K | K | K | K | K | K | M | K | K | K | K | K | K |
| | 390pF (391) | K | K | K | K | K | K | K | K | K | K | K | K | M | K | K | K | K | K | K |
| | 470pF (471) | K | K | K | K | K | K | K | K | K | K | K | M | K | K | K | K | K | K | K |
| | 560pF (561) | K | K | K | K | K | K | K | K | K | K | K | M | K | K | K | K | K | K | K |
| | 680pF (681) | K | K | K | K | K | M | K | K | K | K | K | M | K | K | K | K | K | K | K |
| | 820pF (821) | K | K | K | K | K | M | K | K | K | K | K | M | K | K | K | K | K | M | M |
| | 1,000pF (102) | K | K | K | K | K | M | K | K | K | K | K | M | K | K | K | K | K | M | M |
| | 1,200pF (122) | K | K | K | K | K | | K | K | K | K | M | M | K | K | K | K | K | M | |
| | 1,500pF (152) | K | K | K | K | M | | K | K | K | K | M | M | M | K | K | K | K | M | |
| | 1,800pF (182) | K | K | K | K | M | | K | K | K | K | M | M | | K | K | K | K | M | |
| | 2,200pF (222) | K | K | K | K | M | | K | K | K | K | M | M | | K | K | K | K | M | |
| | 2,700pF (272) | K | K | K | K | M | | K | K | K | K | M | M | | K | K | K | K | M | |
| | 3,300pF (332) | K | K | K | K | M | | K | K | K | K | M | M | | K | K | K | K | M | |
| | 3,900pF (392) | K | K | K | M | M | | K | K | K | K | M | M | | K | K | K | K | M | |
| | 4,700pF (472) | K | K | K | M | M | | K | K | K | K | M | M | | K | K | K | K | M | |
| | 5,600pF (562) | K | K | K | M | | | K | K | K | K | M | | | K | K | K | K | M | |
| | 6,800pF (682) | K | K | K | M | | | K | K | K | K | M | | | K | K | K | K | M | |
| | 8,200pF (822) | K | K | K | M | | | K | K | K | K | M | | | K | K | K | K | M | |
| | 0.010uF (103) | K | K | K | M | | | K | K | K | K | M | | | K | K | K | K | M | |
| | 0.012uF (123) | K | K | K | | | | K | K | K | K | | | | K | K | K | K | | |
| | 0.015uF (153) | K | K | K | | | | K | K | K | K | | | | K | K | K | K | | |
| | 0.018uF (183) | K | K | K | | | | K | K | K | K | | | | K | K | K | K | | |
| 0.022uF (223) | K | K | K | | | | K | K | K | K | | | | K | K | K | K | | | |
| 0.027uF (273) | K | K | K | | | | K | K | K | | | | | K | K | K | K | | | |
| 0.033uF (333) | K | K | K | | | | K | K | K | | | | | K | K | K | K | | | |
| 0.039uF (393) | K | K | M | | | | K | K | M | | | | | K | K | K | K | | | |
| 0.047uF (473) | K | K | | | | | K | M | M | | | | | K | K | K | K | | | |
| 0.056uF (563) | K | M | | | | | K | M | | | | | | K | M | M | M | | | |
| 0.068uF (683) | K | M | | | | | K | M | | | | | | K | M | M | M | | | |
| 0.082uF (823) | M | | | | | | M | | | | | | | K | M | M | | | | |
| 0.1uF (104) | M | | | | | | M | | | | | | | M | M | | | | | |
| 0.12uF (124) | | | | | | | | | | | | | | | | | | | | |
| 0.15uF (154) | | | | | | | | | | | | | | | | | | | | |
| 0.18uF (184) | | | | | | | | | | | | | | | | | | | | |
| 0.22uF (224) | | | | | | | | | | | | | | | | | | | | |
| 0.27uF (274) | | | | | | | | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact local representative.

7-1. CAPACITANCE RANGE (X7R Dielectric)

0402, 0603 Sizes

| DIELECTRIC | | X7R | | | | | | | | | | | |
|---------------------|---------------|------|----|----|----|-----|------|----|----|----|-----|-----|-----|
| SIZE | | 0402 | | | | | 0603 | | | | | | |
| RATED VOLTAGE (VDC) | | 10 | 16 | 25 | 50 | 100 | 10 | 16 | 25 | 50 | 100 | 200 | 250 |
| Capacitance | 100pF (101) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 120pF (121) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 150pF (151) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 180pF (181) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 220pF (221) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 270pF (271) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 330pF (331) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 390pF (391) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 470pF (471) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 560pF (561) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 680pF (681) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 820pF (821) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 1,000pF (102) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 1,200pF (122) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 1,500pF (152) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 1,800pF (182) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 2,200pF (222) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 2,700pF (272) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 3,300pF (332) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 3,900pF (392) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 4,700pF (472) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 5,600pF (562) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 6,800pF (682) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 8,200pF (822) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 0.010μF (103) | E | E | E | E | E | S | S | S | S | S | X | X |
| | 0.012μF (123) | E | E | E | E | E | S | S | S | S | X | | |
| | 0.015μF (153) | E | E | E | E | E | S | S | S | S | X | | |
| | 0.018μF (183) | E | E | E | E | E | S | S | S | S | X | | |
| | 0.022μF (223) | E | E | E | E | E | S | S | S | S | X | | |
| | 0.027μF (273) | E | E | E | E | E | S | S | S | S | X | | |
| | 0.033μF (333) | E | E | E | E | E | S | S | S | X | X | | |
| | 0.039μF (393) | E | E | E | E | E | S | S | S | X | X | | |
| | 0.047μF (473) | E | E | E | E | E | S | S | S | X | X | | |
| | 0.056μF (563) | E | E | E | E | E | S | S | S | X | X | | |
| | 0.068μF (683) | E | E | E | E | E | S | S | S | X | X | | |
| | 0.082μF (823) | E | E | E | E | E | S | S | S | X | X | | |
| | 0.10μF (104) | E | E | E | E | E | S | S | S | X | X | | |
| | 0.12μF (124) | | | | | | S | S | X | | | | |
| | 0.15μF (154) | | | | | | S | S | X | | | | |
| | 0.18μF (184) | | | | | | S | S | X | | | | |
| | 0.22μF (224) | | | | | | S | S | X | X | | | |
| | 0.27μF (274) | | | | | | X | X | X | | | | |
| | 0.33μF (334) | | | | | | X | X | X | | | | |
| | 0.39μF (394) | | | | | | X | X | X | | | | |
| | 0.47μF (474) | | | | | | X | X | X | | | | |
| | 0.56μF (564) | | | | | | X | X | | | | | |
| | 0.68μF (684) | | | | | | X | X | | | | | |
| 0.82μF (824) | | | | | | X | X | | | | | | |
| 1.0μF (105) | | | | | | X | X | X | | | | | |
| 1.5μF (155) | | | | | | | | | | | | | |
| 2.2μF (225) | | | | | | | | | | | | | |
| 4.7μF (475) | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

X7R Dielectric 0805 Size

| DIELECTRIC SIZE | | X7R 0805 | | | | | | | | | |
|---------------------|---------------|----------|----|----|----|-----|-----|-----|-----|-----|------|
| RATED VOLTAGE (VDC) | | 10 | 16 | 25 | 50 | 100 | 200 | 250 | 500 | 630 | 1000 |
| Capacitance | 100pF (101) | D | D | D | D | D | D | D | B | B | B |
| | 120pF (121) | D | D | D | D | D | D | D | B | B | B |
| | 150pF (151) | D | D | D | D | D | D | D | B | B | B |
| | 180pF (181) | D | D | D | D | D | D | D | B | B | B |
| | 220pF (221) | D | D | D | D | D | D | D | B | B | B |
| | 270pF (271) | D | D | D | D | D | D | D | B | B | B |
| | 330pF (331) | D | D | D | D | D | D | D | B | B | B |
| | 390pF (391) | D | D | D | D | D | D | D | B | B | B |
| | 470pF (471) | D | D | D | D | D | D | D | B | B | B |
| | 560pF (561) | D | D | D | D | D | D | D | B | B | B |
| | 680pF (681) | D | D | D | D | D | D | D | B | B | B |
| | 820pF (821) | D | D | D | D | D | D | D | B | B | B |
| | 1,000pF (102) | D | D | D | D | D | D | D | B | B | B |
| | 1,200pF (122) | D | D | D | D | D | D | D | B | B | B |
| | 1,500pF (152) | D | D | D | D | D | D | D | B | B | D |
| | 1,800pF (182) | D | D | D | D | D | D | D | B | B | D |
| | 2,200pF (222) | D | D | D | D | D | D | D | B | B | D |
| | 2,700pF (272) | D | D | D | D | D | D | D | B | B | |
| | 3,300pF (332) | D | D | D | D | D | D | D | B | B | |
| | 3,900pF (392) | D | D | D | D | D | D | D | B | B | |
| | 4,700pF (472) | D | D | D | D | D | D | D | D | D | |
| | 5,600pF (562) | D | D | D | D | D | D | D | D | D | |
| | 6,800pF (682) | D | D | D | D | D | D | D | D | D | |
| | 8,200pF (822) | D | D | D | D | D | D | D | D | D | |
| | 0.010μF (103) | D | D | D | D | D | D | D | D | D | |
| | 0.012μF (123) | D | D | D | D | D | D | D | D | D | |
| | 0.015μF (153) | D | D | D | D | D | D | D | D | D | |
| | 0.018μF (183) | D | D | D | D | D | D | D | D | D | |
| | 0.022μF (223) | D | D | D | D | D | D | D | D | D | |
| | 0.027μF (273) | D | D | D | D | D | D | D | D | D | |
| | 0.033μF (333) | D | D | D | D | D | D | D | D | | |
| | 0.039μF (393) | D | D | D | D | D | D | D | | | |
| | 0.047μF (473) | D | D | D | D | D | D | D | | | |
| | 0.056μF (563) | D | D | D | D | D | D | D | | | |
| | 0.068μF (683) | D | D | D | D | D | D | D | | | |
| | 0.082μF (823) | D | D | D | D | D | D | | | | |
| | 0.10μF (104) | D | D | D | D | D | D | | | | |
| | 0.12μF (124) | D | D | D | D | I | | | | | |
| | 0.15μF (154) | D | D | D | D | I | | | | | |
| | 0.18μF (184) | D | D | D | D | I | | | | | |
| 0.22μF (224) | D | D | D | D | I | | | | | | |
| 0.27μF (274) | I | I | I | I | | | | | | | |
| 0.33μF (334) | I | I | I | I | | | | | | | |
| 0.39μF (394) | I | I | I | I | | | | | | | |
| 0.47μF (474) | I | I | I | I | | | | | | | |
| 0.56μF (564) | I | I | I | | | | | | | | |
| 0.68μF (684) | I | I | I | | | | | | | | |
| 0.82μF (824) | I | I | I | | | | | | | | |
| 1.0μF (105) | I | I | I | I | | | | | | | |
| 1.5μF (155) | I | I | I | | | | | | | | |
| 2.2μF (225) | I | I | I | | | | | | | | |
| 4.7μF (475) | | I | | | | | | | | | |
| 10μF (106) | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

X7R Dielectric 1206 Size

| DIELECTRIC | | X7R | | | | | | | | | | | | | |
|---------------------|---------------|------|----|----|----|-----|-----|-----|-----|-----|-----|-----|------|------|------|
| SIZE | | 1206 | | | | | | | | | | | | | |
| RATED VOLTAGE (VDC) | | 10 | 16 | 25 | 50 | 100 | 200 | 250 | 400 | 450 | 500 | 630 | 1000 | 1500 | 2000 |
| Capacitance | 100pF (101) | | | | | | D | D | | | D | D | D | D | D |
| | 120pF (121) | | | | | | D | D | | | D | D | D | D | D |
| | 150pF (151) | D | D | D | D | D | D | D | | | D | D | D | D | D |
| | 180pF (181) | D | D | D | D | D | D | D | | | D | D | D | D | D |
| | 220pF (221) | D | D | D | D | D | D | D | | | D | D | D | D | D |
| | 270pF (271) | D | D | D | D | D | D | D | | | D | D | D | D | D |
| | 330pF (331) | D | D | D | D | D | D | D | | | D | D | D | D | D |
| | 390pF (391) | D | D | D | D | D | D | D | | | D | D | D | D | D |
| | 470pF (471) | D | D | D | D | D | D | D | | | D | D | D | D | D |
| | 560pF (561) | D | D | D | D | D | D | D | | | D | D | D | D | D |
| | 680pF (681) | D | D | D | D | D | D | D | | | D | D | D | D | D |
| | 820pF (821) | D | D | D | D | D | D | D | | | D | D | D | G | G |
| | 1,000pF (102) | D | D | D | D | D | D | D | | | D | D | D | G | G |
| | 1,200pF (122) | D | D | D | D | D | D | D | | | D | D | D | G | G |
| | 1,500pF (152) | D | D | D | D | D | D | D | | | D | D | D | G | G |
| | 1,800pF (182) | D | D | D | D | D | D | D | | | D | D | D | G | G |
| | 2,200pF (222) | D | D | D | D | D | D | D | | | D | D | D | G | G |
| | 2,700pF (272) | D | D | D | D | D | D | D | | | D | D | D | G | G |
| | 3,300pF (332) | D | D | D | D | D | D | D | | | D | D | D | G | G |
| | 3,900pF (392) | D | D | D | D | D | D | D | | | D | D | D | G | |
| | 4,700pF (472) | D | D | D | D | D | D | D | | | D | D | D | G | |
| | 5,600pF (562) | D | D | D | D | D | D | D | | | D | D | D | G | |
| | 6,800pF (682) | D | D | D | D | D | D | D | | | D | D | D | G | |
| | 8,200pF (822) | D | D | D | D | D | D | D | | | D | D | D | G | |
| | 0.010μF (103) | D | D | D | D | D | D | D | | | D | D | D | G | |
| | 0.012μF (123) | D | D | D | D | D | D | D | | | D | D | G | | |
| | 0.015μF (153) | D | D | D | D | D | D | D | | | D | D | G | | |
| | 0.018μF (183) | D | D | D | D | D | D | D | | | D | D | | | |
| | 0.022μF (223) | D | D | D | D | D | D | D | | | G | G | | | |
| | 0.027μF (273) | D | D | D | D | D | D | D | | | G | G | | | |
| | 0.033μF (333) | D | D | D | D | D | G | G | | | G | G | | | |
| | 0.039μF (393) | D | D | D | D | D | G | G | | | G | G | | | |
| | 0.047μF (473) | D | D | D | D | D | G | G | | | G | G | | | |
| | 0.056μF (563) | D | D | D | D | D | G | G | | | G | G | | | |
| | 0.068μF (683) | D | D | D | D | D | G | G | G | G | | | | | |
| | 0.082μF (823) | D | D | D | D | D | G | G | G | G | | | | | |
| | 0.10μF (104) | D | D | D | D | D | G | G | G | G | | | | | |
| | 0.12μF (124) | D | D | D | D | D | | | | | | | | | |
| | 0.15μF (154) | C | C | C | C | G | | | | | | | | | |
| | 0.18μF (184) | C | C | C | C | G | | | | | | | | | |
| | 0.22μF (224) | C | C | C | C | G | | | | | | | | | |
| | 0.27μF (274) | C | C | C | D | G | | | | | | | | | |
| | 0.33μF (334) | C | C | C | D | G | | | | | | | | | |
| | 0.39μF (394) | C | C | J | P | G | | | | | | | | | |
| | 0.47μF (474) | J | J | J | P | G | | | | | | | | | |
| | 0.56μF (564) | J | J | J | P | P | | | | | | | | | |
| | 0.68μF (684) | J | J | J | P | P | | | | | | | | | |
| 0.82μF (824) | J | J | J | P | P | | | | | | | | | | |
| 1.0μF (105) | J | J | J | P | P | | | | | | | | | | |
| 1.5μF (155) | J | J | P | | | | | | | | | | | | |
| 2.2μF (225) | J | J | P | P | | | | | | | | | | | |
| 3.3μF (335) | P | P | P | | | | | | | | | | | | |
| 4.7μF (475) | P | P | P | | | | | | | | | | | | |
| 10μF (106) | P | P | P | | | | | | | | | | | | |
| 22μF (226) | P | | | | | | | | | | | | | | |
| 47μF (476) | | | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

X7R Dielectric 1210 Size

| DIELECTRIC | | X7R | | | | | | | | | | | | | | | |
|---------------------|---------------|------|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|------|------|------|---|
| SIZE | | 1210 | | | | | | | | | | | | | | | |
| RATED VOLTAGE (VDC) | | 6.3 | 10 | 16 | 25 | 50 | 100 | 200 | 250 | 400 | 450 | 500 | 630 | 1000 | 1500 | 2000 | |
| Capacitance | 100pF (101) | | | | | | | | | | | D | D | D | D | D | |
| | 120pF (121) | | | | | | | | | | | D | D | D | D | D | |
| | 150pF (151) | | | | | | | | | | | D | D | D | D | D | |
| | 180pF (181) | | | | | | | | | | | D | D | D | D | D | |
| | 220pF (221) | | | | | | | | | | | D | D | D | D | D | |
| | 270pF (271) | | | | | | | | | | | D | D | D | D | D | |
| | 330pF (331) | | | | | | | | | | | D | D | D | D | D | |
| | 390pF (391) | | | | | | | | | | | D | D | D | D | D | |
| | 470pF (471) | | | | | | | | | | | D | D | D | D | D | |
| | 560pF (561) | | | | | | | | | | | D | D | D | D | D | |
| | 680pF (681) | | | | | | | | | | | D | D | D | D | D | |
| | 820pF (821) | | | | | | | | | | | D | D | D | D | D | |
| | 1,000pF (102) | | | C | C | C | C | C | C | C | | | D | D | D | D | D |
| | 1,200pF (122) | | | C | C | C | C | C | C | C | | | D | D | D | M | M |
| | 1,500pF (152) | | | C | C | C | C | C | C | C | | | D | D | D | M | M |
| | 1,800pF (182) | | | C | C | C | C | C | C | C | | | D | D | D | M | M |
| | 2,200pF (222) | | | C | C | C | C | C | C | C | | | D | D | D | M | M |
| | 2,700pF (272) | | | C | C | C | C | C | C | C | | | D | D | D | M | M |
| | 3,300pF (332) | | | C | C | C | C | C | C | C | | | D | D | D | M | M |
| | 3,900pF (392) | | | C | C | C | C | C | C | C | | | D | D | G | M | M |
| | 4,700pF (472) | | | C | C | C | C | C | C | C | | | D | D | G | M | M |
| | 5,600pF (562) | | | C | C | C | C | C | C | C | | | D | D | G | M | M |
| | 6,800pF (682) | | | C | C | C | C | C | C | C | | | D | D | G | M | M |
| | 8,200pF (822) | | | C | C | C | C | C | C | C | | | D | D | G | M | M |
| | 0.010μF (103) | | | C | C | C | C | C | C | C | | | D | D | G | | |
| | 0.012μF (123) | | | C | C | C | C | C | C | C | | | D | D | G | | |
| | 0.015μF (153) | | | C | C | C | C | C | C | C | | | D | D | G | | |
| | 0.018μF (183) | | | C | C | C | C | C | C | C | | | D | D | G | | |
| | 0.022μF (223) | | | C | C | C | C | C | C | C | | | D | D | G | | |
| | 0.027μF (273) | | | C | C | C | C | C | C | C | | | G | G | G | | |
| | 0.033μF (333) | | | C | C | C | C | C | C | C | | | G | G | G | | |
| | 0.039μF (393) | | | C | C | C | C | C | C | C | | | G | G | K | | |
| | 0.047μF (473) | | | C | C | C | C | C | D | D | | | G | G | M | | |
| | 0.056μF (563) | | | C | C | C | C | C | D | D | | | G | G | | | |
| | 0.068μF (683) | | | C | C | C | C | C | G | G | | | K | K | | | |
| | 0.082μF (823) | | | C | C | C | C | C | G | G | | | K | K | | | |
| | 0.10μF (104) | | | C | C | C | C | C | G | G | | | K | K | | | |
| | 0.12μF (124) | | | C | C | C | C | C | G | G | M | M | | | | | |
| | 0.15μF (154) | | | C | C | C | C | D | M | M | M | M | | | | | |
| | 0.18μF (184) | | | C | C | C | C | D | M | M | M | M | | | | | |
| | 0.22μF (224) | | | C | C | C | C | D | M | M | M | M | | | | | |
| | 0.27μF (274) | | | C | C | C | C | G | M | M | M | M | | | | | |
| | 0.33μF (334) | | | C | C | C | D | G | M | M | M | M | | | | | |
| | 0.39μF (394) | | | C | C | C | D | M | M | M | | | | | | | |
| | 0.47μF (474) | | | C | C | C | D | M | M | M | | | | | | | |
| | 0.56μF (564) | | | D | D | D | D | M | M | M | | | | | | | |
| | 0.68μF (684) | | | D | D | D | D | K | M | M | | | | | | | |
| 0.82μF (824) | | | D | D | D | D | K | | | | | | | | | | |
| 1.0μF (105) | | | D | D | D | D | K | | | | | | | | | | |
| 1.5μF (155) | | | | K | G | M | M | | | | | | | | | | |
| 2.2μF (225) | | | | K | G | M | M | | | | | | | | | | |
| 3.3μF (335) | | | | K | G | M | | | | | | | | | | | |
| 4.7μF (475) | | | K | K | K | | M | | | | | | | | | | |
| 10μF (106) | | | K | K | M | M | | | | | | | | | | | |
| 22μF (226) | | | | M | | | | | | | | | | | | | |
| 47μF (476) | | M | | | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

X7R Dielectric 1808, 1812 Sizes

| DIELECTRIC | | X7R | | | | | | | | | | | | | | | | | | | |
|---------------------|---------------|------|-----|------|------|------|------|------|----|----|----|-----|-----|-----|-----|-----|------|------|------|------|---|
| SIZE | | 1808 | | | | | | 1812 | | | | | | | | | | | | | |
| RATED VOLTAGE (VDC) | | 500 | 630 | 1000 | 1500 | 2000 | 3000 | 10 | 16 | 25 | 50 | 100 | 200 | 250 | 500 | 630 | 1000 | 1500 | 2000 | 3000 | |
| Capacitance | 100pF (101) | | | | | | | | | | | | | | | | | | | | |
| | 120pF (121) | | | | | | | | | | | | | | | | | | | | |
| | 150pF (151) | D | D | D | D | D | D | | | | | | | | | | | | | | |
| | 180pF (181) | D | D | D | D | D | D | | | | | | | | | | | | | | |
| | 220pF (221) | D | D | D | D | D | D | | | | | | | | | | | | | | |
| | 270pF (271) | D | D | D | D | D | D | | | | | | D | D | D | D | D | D | D | D | K |
| | 330pF (331) | D | D | D | D | D | K | | | | | | D | D | D | D | D | D | D | D | K |
| | 390pF (391) | D | D | D | D | D | K | | | | | | D | D | D | D | D | D | D | D | K |
| | 470pF (471) | D | D | D | D | D | K | | | | | | D | D | D | D | D | D | D | D | K |
| | 560pF (561) | D | D | D | D | D | K | | | | | | D | D | D | D | D | D | D | D | K |
| | 680pF (681) | D | D | D | D | D | K | | | | | | D | D | D | D | D | D | D | D | K |
| | 820pF (821) | D | D | D | D | D | K | | | | | | D | D | D | D | D | D | D | D | K |
| | 1,000pF (102) | D | D | D | K | K | K | D | D | D | D | D | D | D | D | D | D | D | D | D | K |
| | 1,200pF (122) | D | D | D | K | K | K | D | D | D | D | D | D | D | D | D | D | D | D | D | K |
| | 1,500pF (152) | D | D | D | K | K | K | D | D | D | D | D | D | D | D | D | D | D | D | D | K |
| | 1,800pF (182) | D | D | D | K | K | K | D | D | D | D | D | D | D | D | D | D | D | G | G | M |
| | 2,200pF (222) | D | D | D | K | K | | D | D | D | D | D | D | D | D | D | D | D | G | G | M |
| | 2,700pF (272) | D | D | D | K | K | | D | D | D | D | D | D | D | D | D | D | D | G | G | M |
| | 3,300pF (332) | D | D | D | K | K | | D | D | D | D | D | D | D | D | D | D | D | K | K | M |
| | 3,900pF (392) | D | D | D | K | K | | D | D | D | D | D | D | D | D | D | D | D | K | K | M |
| | 4,700pF (472) | D | D | D | K | K | | D | D | D | D | D | D | D | D | D | D | D | K | K | M |
| | 5,600pF (562) | K | K | K | K | K | | D | D | D | D | D | D | D | D | D | D | D | M | M | M |
| | 6,800pF (682) | K | K | K | K | K | | D | D | D | D | D | D | D | D | D | D | D | M | M | M |
| | 8,200pF (822) | K | K | K | | | | D | D | D | D | D | D | D | D | D | D | D | M | M | |
| | 0.010μF (103) | K | K | K | | | | D | D | D | D | D | D | D | D | D | D | D | M | M | |
| | 0.012μF (123) | K | K | K | | | | D | D | D | D | D | D | D | D | D | D | K | | | |
| | 0.015μF (153) | K | K | K | | | | D | D | D | D | D | D | D | D | D | D | K | | | |
| | 0.018μF (183) | K | K | K | | | | D | D | D | D | D | D | D | D | D | D | M | | | |
| | 0.022μF (223) | K | K | K | | | | D | D | D | D | D | D | D | D | D | D | M | | | |
| | 0.027μF (273) | K | K | K | | | | D | D | D | D | D | D | D | D | D | D | M | | | |
| | 0.033μF (333) | K | K | K | | | | D | D | D | D | D | D | D | D | D | D | M | | | |
| | 0.039μF (393) | K | K | K | | | | D | D | D | D | D | D | D | D | D | D | M | | | |
| | 0.047μF (473) | K | K | K | | | | D | D | D | D | D | D | D | D | D | D | M | | | |
| | 0.056μF (563) | K | K | K | | | | D | D | D | D | D | D | D | D | K | K | M | | | |
| | 0.068μF (683) | K | K | | | | | D | D | D | D | D | D | D | D | K | K | M | | | |
| | 0.082μF (823) | K | K | | | | | D | D | D | D | D | D | D | D | K | K | M | | | |
| | 0.10μF (104) | | | | | | | D | D | D | D | D | D | D | D | K | K | M | | | |
| | 0.12μF (124) | | | | | | | D | D | D | D | D | D | D | D | M | M | | | | |
| | 0.15μF (154) | | | | | | | D | D | D | D | D | K | K | M | M | | | | | |
| | 0.18μF (184) | | | | | | | D | D | D | D | D | K | K | M | M | | | | | |
| | 0.22μF (224) | | | | | | | D | D | D | D | D | K | K | M | M | | | | | |
| | 0.27μF (274) | | | | | | | D | D | D | D | D | K | K | M | | | | | | |
| 0.33μF (334) | | | | | | | D | D | D | D | D | K | K | M | | | | | | | |
| 0.39μF (394) | | | | | | | D | D | D | D | D | K | K | M | | | | | | | |
| 0.47μF (474) | | | | | | | D | D | D | D | K | K | K | M | | | | | | | |
| 0.56μF (564) | | | | | | | D | D | D | D | K | M | M | | | | | | | | |
| 0.68μF (684) | | | | | | | D | D | D | K | K | M | M | | | | | | | | |
| 0.82μF (824) | | | | | | | D | D | D | K | K | M | M | | | | | | | | |
| 1.0μF (105) | | | | | | | D | D | D | K | K | M | M | | | | | | | | |
| 1.5μF (155) | | | | | | | | | | | | K | | | | | | | | | |
| 2.2μF (225) | | | | | | | | | | M | M | | | | | | | | | | |
| 3.3μF (335) | | | | | | | | | | | | | | | | | | | | | |
| 4.7μF (475) | | | | | | | | | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

X7R Dielectric 1825 to 2225 Sizes

| DIELECTRIC | | X7R | | | | | | | | | | | | | | | | | | | | |
|---------------|---------------|------|-----|-----|------|------|------|------|----|-----|-----|-----|-----|------|------|------|-----|-----|------|------|------|---|
| SIZE | | 1825 | | | | | | 2220 | | | | | | 2225 | | | | | | | | |
| RATED VOLTAGE | | 250 | 500 | 630 | 1000 | 2000 | 3000 | 25 | 50 | 100 | 250 | 500 | 630 | 1000 | 2000 | 3000 | 500 | 630 | 1000 | 2000 | 3000 | |
| Capacitance | 1,000pF (102) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | |
| | 1,200pF (122) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 1,500pF (152) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 1,800pF (182) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 2,200pF (222) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 2,700pF (272) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 3,300pF (332) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 3,900pF (392) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 4,700pF (472) | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K | K |
| | 5,600pF (562) | K | K | K | K | K | M | K | K | K | K | K | K | K | K | K | K | K | K | K | K | M |
| | 6,800pF (682) | K | K | K | K | K | M | K | K | K | K | K | K | K | K | M | M | K | K | K | K | M |
| | 8,200pF (822) | K | K | K | K | K | M | K | K | K | K | K | K | K | M | M | K | K | K | K | K | M |
| | 0.010μF (103) | K | K | K | K | K | M | K | K | K | K | K | K | K | M | M | K | K | K | K | K | M |
| | 0.012μF (123) | K | K | K | K | M | U | K | K | K | K | K | K | K | M | U | K | K | K | M | M | |
| | 0.015μF (153) | K | K | K | K | M | U | K | K | K | K | K | K | K | M | U | K | K | K | M | M | |
| | 0.018μF (183) | K | K | K | K | M | U | K | K | K | K | K | K | K | U | U | K | K | K | M | U | |
| | 0.022μF (223) | K | K | K | K | M | | K | K | K | K | K | K | K | U | | K | K | K | M | | |
| | 0.027μF (273) | K | K | K | K | U | | K | K | K | K | K | K | K | U | | K | K | K | M | | |
| | 0.033μF (333) | K | K | K | K | U | | K | K | K | K | K | K | K | U | | K | K | K | M | | |
| | 0.039μF (393) | K | K | K | K | U | | K | K | K | K | K | K | K | U | | K | K | K | U | | |
| | 0.047μF (473) | K | K | K | K | U | | K | K | K | K | K | K | K | U | | K | K | K | U | | |
| | 0.056μF (563) | K | K | K | K | | | K | K | K | K | K | K | K | U | | K | K | K | U | | |
| | 0.068μF (683) | K | K | K | K | | | K | K | K | K | K | K | M | | | K | K | K | | | |
| | 0.082μF (823) | K | K | K | M | | | K | K | K | K | K | K | M | | | K | K | K | | | |
| | 0.10μF (104) | K | K | K | M | | | K | K | K | K | K | K | M | | | K | K | K | | | |
| | 0.12μF (124) | K | K | K | | | | K | K | K | K | K | K | M | | | K | K | U | | | |
| | 0.15μF (154) | K | K | K | | | | K | K | K | K | K | K | U | | | K | K | U | | | |
| | 0.18μF (184) | K | K | K | | | | K | K | K | K | K | K | U | | | K | K | U | | | |
| | 0.22μF (224) | K | K | K | | | | K | K | K | K | K | K | U | | | K | K | U | | | |
| | 0.27μF (274) | K | K | K | | | | K | K | K | K | K | K | | | | K | K | | | | |
| | 0.33μF (334) | K | K | K | | | | K | K | K | K | K | K | | | | K | K | | | | |
| | 0.39μF (394) | K | K | K | | | | K | K | K | K | K | K | | | | K | K | | | | |
| | 0.47μF (474) | K | K | K | | | | K | K | K | K | K | K | | | | K | K | | | | |
| | 0.56μF (564) | K | M | M | | | | K | K | K | K | M | M | | | | K | K | | | | |
| | 0.68μF (684) | K | | | | | | K | K | K | K | M | M | | | | | | | | | |
| | 0.82μF (824) | K | | | | | | K | K | K | K | U | U | | | | | | | | | |
| 1.0μF (105) | K | | | | | | K | K | K | K | U | U | | | | | | | | | | |
| 1.5μF (155) | | | | | | | K | K | K | M | | | | | | | | | | | | |
| 2.2μF (225) | | | | | | | K | K | K | M | | | | | | | | | | | | |
| 3.3μF (335) | | | | | | | | K | K | | | | | | | | | | | | | |
| 4.7μF (475) | | | | | | | | K | M | | | | | | | | | | | | | |
| 6.8μF (685) | | | | | | | | M | U | | | | | | | | | | | | | |
| 10μF (106) | | | | | | | | U | U | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact local representative.

7-2. CAPACITANCE RANGE (X5R Dielectric)

| Dielectric | | X5R | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|---------------|------|----|----|----|------|----|----|----|----|------|----|----|----|----|------|----|----|----|----|------|----|----|----|----|--|---|---|---|--|
| Size | | 0402 | | | | 0603 | | | | | 0805 | | | | | 1206 | | | | | 1210 | | | | | | | | | |
| Rated Voltage | | 6.3 | 10 | 16 | 25 | 6.3 | 10 | 16 | 25 | 50 | 6.3 | 10 | 16 | 25 | 50 | 6.3 | 10 | 16 | 25 | 50 | 6.3 | 10 | 16 | 25 | 50 | | | | | |
| Capacitance | 0.033μF (333) | | | E | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.047μF (473) | | | E | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.068μF (683) | | E | E | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.10μF (104) | E | E | E | E | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.15μF (154) | E | E | E | E | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.22μF (224) | E | E | E | E | | | X | X | | | | | | | | | | | | | | | | | | | | | |
| | 0.33μF (334) | E | E | | | X | X | X | X | | | | | | | | | | | | | | | | | | | | | |
| | 0.47μF (474) | E | E | | | X | X | X | X | | | | | | | | | | | | | | | | | | | | | |
| | 0.68μF (684) | E | E | | | X | X | X | X | | | | | | | | | | | | | | | | | | | | | |
| | 1.0μF (105) | | | | | X | X | X | X | | | | | | | | | | | | | | | | | | | | | |
| | 1.5μF (155) | | | | | X | | | | | I | I | I | I | | | J | J | | | | | | | | | K | K | | |
| | 2.2μF (225) | | | | | X | X | X | | | I | I | I | I | | | J | J | P | | | | | | | | K | K | | |
| | 3.3μF (335) | | | | | X | | | | | I | I | I | I | | | P | P | P | | | | | | | | | | | |
| | 4.7μF (475) | | | | | X | | | | | | | | | | | P | P | P | P | | | | | | | K | K | K | |
| | 6.8μF (685) | | | | | | | | | | | | | | | | P | P | | | | | | | | | | | | |
| | 10μF (106) | | | | | | | | | | | | | | | | P | P | P | P | | | | | | | K | K | K | |
| 22μF (226) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact local representative.

7-3. CAPACITANCE RANGE (Y5V Dielectric)

| DIELECTRIC | | 0402 | | | | | | | | 0603 | | | |
|---------------|---------------|------|----|----|----|----|----|----|----|------|--|--|--|
| SIZE | | | | | | | | | | | | | |
| RATED VOLTAGE | | 6.3 | 10 | 16 | 25 | 50 | 10 | 16 | 25 | 50 | | | |
| Capacitance | 0.010μF (103) | | E | E | E | E | S | S | S | S | | | |
| | 0.015μF (153) | | E | E | E | E | S | S | S | S | | | |
| | 0.022μF (223) | | E | E | E | E | S | S | S | S | | | |
| | 0.033μF (333) | | E | E | E | E | S | S | S | S | | | |
| | 0.047μF (473) | | E | E | E | | S | S | S | S | | | |
| | 0.068μF (683) | | E | E | E | | S | S | S | S | | | |
| | 0.10μF (104) | | E | E | E | | S | S | S | S | | | |
| | 0.15μF (154) | | | E | | | S | S | S | S | | | |
| | 0.22μF (224) | E | | E | | | S | S | S | S | | | |
| | 0.33μF (334) | E | | E | | | S | S | S | | | | |
| | 0.47μF (474) | | | | | | S | S | | | | | |
| | 0.68μF (684) | | | | | | S | X | | | | | |
| | 1.0μF (105) | | | | | | S | X | | | | | |
| 2.2μF (225) | | | | | | S | | | | | | | |
| 4.7μF (475) | | | | | | | | | | | | | |

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact local representative.

8. PACKAGING STYLE AND QUANTITY

| Size | Thickness (mm)/Symbol | | Paper tape | | Plastic tape | |
|-------------|-----------------------|---|------------|----------|--------------|----------|
| | | | 7" reel | 13" reel | 7" reel | 13" reel |
| 0402 (1005) | 0.50±0.20 | E | 10k | - | - | - |
| 0603 (1608) | 0.80±0.07 | S | 4k | 15k | - | - |
| | 0.80±0.30 | X | 4k | 15k | - | - |
| 0805 (2012) | 0.60±0.10 | A | 4k | 15k | - | - |
| | 0.80±0.10 | B | 4k | 15k | - | - |
| | 1.25±0.10 | D | - | - | 3k | 10k |
| | 1.25±0.30 | I | - | - | 3k | 10k |
| 1206 (3216) | 0.80±0.10 | B | 4k | 15k | - | - |
| | 0.95±0.10 | C | - | - | 3k | 10k |
| | 1.15±0.15 | J | - | - | 3k | 10k |
| | 1.25±0.10 | D | - | - | 3k | 10k |
| | 1.60±0.20 | G | - | - | 2k | 10k |
| | 1.60±0.50 | P | - | - | 2k | 9k |
| 1210 (3225) | 0.95±0.10 | C | - | - | 3k | 10k |
| | 1.25±0.10 | D | - | - | 3k | 10k |
| | 1.60±0.20 | G | - | - | 2k | - |
| | 2.00±0.20 | K | - | - | 1k | 6k |
| | 2.50±0.50 | M | - | - | 1k | 6k |
| 1808 (4520) | 1.25±0.10 | D | - | - | 2k | 10k |
| | 1.60±0.20 | G | - | - | 2k | 8k |
| | 2.00±0.20 | K | - | - | 1k | 6k |
| 1812 (4532) | 1.25±0.10 | D | - | - | 1k | 5k |
| | 1.60±0.20 | G | - | - | 1k | - |
| | 2.00±0.20 | K | - | - | 1k | - |
| | 2.50±0.50 | M | - | - | 0.5k | 3k |
| 1825 (4563) | 2.00±0.20 | K | - | - | 1k | - |
| 2220 (5750) | 2.50±0.30 | M | - | - | 0.5k | - |
| 2225 (5763) | 2.80±0.30 | U | - | - | 0.5k | - |

Unit: pieces

9. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

| No. | Item | Test Condition | Requirements | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------|--------|--------------------|--------------------------------------------------------------------|----------------------------------|-----|--------|-----------------------------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------|-----|--------|-----------------------|------------------------------------------------------|-------------------------------------------------------------|-----|--------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----|--------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|-----|------|---------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------------------------------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------|--------------------|----|-------|-----|------------|--------|---------------------|-------|------|-----------------------------------------------------------|----------------------|-----|------|-----|-----|------|------------------------------------------------------------------------------|----------------------------------------------------------------------------|------------------------------------|------------------|------|-----------------------|--------------------|------|----------------------------------------------------------------------------------------|-----|---------|---------------------|------|-------|-----|
| 1. | Visual and Mechanical | --- | * No remarkable defect. * Dimensions to conform to individual specification sheet. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. | Capacitance | *Test temp.: Room Temperature. *Class I: (NP0) | * Shall not exceed the limits given in the detailed spec. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3. | Q/ D.F. (Dissipation Factor) | <p>≤ 1000pF, 1.0±0.2Vrms · 1MHz±10% > 1000pF, 1.0±0.2Vrms · 1KHz±10% Class II: (X7R, X7E, X6S, X5R,X7S,Y5V) C ≤ 10μF, 1.0±0.2Vrms · 1KHz±10% ** C > 10μF, 0.5±0.2Vrms · 120Hz±20%</p> <p>** Test condition: 0.5±0.2Vrms · 1KHz±10% X7R: 0805=106(6.3V), 0603/475(6.3V) X5R: 0201 ≥ 224 (6.3V,10V,16V)^{#1}, 0402 ≥ 475 (6.3V,16V), 0402 ≥ 225(10V), 0603=106 (6.3V) TT18X ≥ 475(10V) , TT15X series X6S: 0201/474(4V),0201>104 (6.3V,10V), 0402 ≥ 225 (6.3V), 0402/475 (10V), 0603/106 (6.3V), X7S: 0402/225(6.3V)</p> <p>#1 Excluding X5R/0201/105(6.3V);225(10V) , 0402X475M6R3 (1.0±0.2Vrms · 1KHz±10%)</p> <p>* Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.</p> | <p>NP0: Cap≥30pF, Q≥1000; Cap<30pF,Q≥400+20C X7R,X5R,X6S,X7S:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th>Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥ 100V</td> <td rowspan="3">≤ 2.5%</td> <td>≤ 3% 1206 ≥ 0.47μF</td> </tr> <tr> <td>≤ 5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF;TT series</td> </tr> <tr> <td>≤ 10% 0805 > 0.22μF;1210 ≥ 3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤ 2.5%</td> <td>≤ 3% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF</td> </tr> <tr> <td>≤ 5% 0201 ≥ 0.01uF;1210 ≥ 3.3μF</td> </tr> <tr> <td>≤ 10% 0402 ≥ 0.012μF;0603>0.1μF;0805 ≥ 1μF(0805/X7R>0.47μF); 1206 ≥ 2.2μF;1210 ≥ 10μF;TT series</td> </tr> <tr> <td rowspan="3">35V</td> <td rowspan="3">≤ 3.5%</td> <td>≤ 12.5% 1206/X5R=10μF</td> </tr> <tr> <td>≤ 10% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF</td> </tr> <tr> <td>≤ 5% 0201 ≥ 0.01μF(0201/X5R=0.01μF);0805 ≥ 1μF;1210 ≥ 10μF*</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤ 3.5%</td> <td>≤ 7% 0603 ≥ 0.33μF</td> </tr> <tr> <td>≤ 10% 0201 ≥ 0.1μF(0201/X5R>0.01μF);0603 ≥ 0.47μF;TT series; 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF);0805 ≥ 2.2μF; 1206 ≥ 4.7μF;1210 ≥ 22μF(1210/X5R ≥ 10μF)*</td> </tr> <tr> <td>≤ 12.5% 0402 ≥ 0.47μF;0805/X5R/X6S=10μF</td> </tr> <tr> <td rowspan="3">16V</td> <td rowspan="3">≤ 3.5%</td> <td>≤ 5% 0201 ≥ 0.01μF(0201/X5R=0.01μF);0402 ≥ 0.033μF; 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF</td> </tr> <tr> <td>≤ 10% 0201 ≥ 0.1μF(0201/X5R>0.01μF;0201/X7R ≥ 0.022μF);0402 ≥ 0.22uF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF;TT series</td> </tr> <tr> <td>≤ 12.5% 0402/X5R ≥ 1μF;0402/X6S=1μF;0805/X5R/X6S=10μF</td> </tr> <tr> <td rowspan="3">10V</td> <td rowspan="3">≤ 5%</td> <td>≤ 10% 0201 ≥ 0.012μF;0402 ≥ 0.22μF;0603 ≥ 0.33μF;TT series; 0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF;01R5/X5R</td> </tr> <tr> <td>≤ 12.5% 0805/X5R/X6S=10μF</td> </tr> <tr> <td>≤ 15% 0201 ≥ 0.1μF(0201/X5R>0.1μF);0402 ≥ 1μF;0603/X5R ≥ 10μF</td> </tr> <tr> <td rowspan="2">6.3V</td> <td rowspan="2">≤ 10%</td> <td>≤ 15% 0201 ≥ 0.1μF(0201/X5R>0.1μF);0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF;0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF;TT series</td> </tr> <tr> <td>≤ 20% 0402 ≥ 2.2μF</td> </tr> <tr> <td>4V</td> <td>≤ 15%</td> <td>---</td> </tr> </tbody> </table> <p>Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th>Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥ 50V</td> <td rowspan="2">≤ 5%</td> <td>≤ 7% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF; TT series</td> </tr> <tr> <td>≤ 12.5% 1210 ≥ 6.8μF</td> </tr> <tr> <td>35V</td> <td>≤ 7%</td> <td>---</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤ 5%</td> <td>≤ 7% 0402 ≥ 0.047μF;0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF</td> </tr> <tr> <td>≤ 9% 0402 ≥ 0.068μF;0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series</td> </tr> <tr> <td>≤ 9% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF</td> </tr> <tr> <td>16V (C<1.0μF)</td> <td>≤ 7%</td> <td>≤ 12.5% 0402 ≥ 0.22μF</td> </tr> <tr> <td>16V (C ≥ 1.0μF)</td> <td>≤ 9%</td> <td>≤ 12.5% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF;1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF; TT series</td> </tr> <tr> <td>10V</td> <td>≤ 12.5%</td> <td>≤ 20% 0402 ≥ 0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤ 20%</td> <td>---</td> </tr> </tbody> </table> | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | ≥ 100V | ≤ 2.5% | ≤ 3% 1206 ≥ 0.47μF | ≤ 5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF;TT series | ≤ 10% 0805 > 0.22μF;1210 ≥ 3.3μF | 50V | ≤ 2.5% | ≤ 3% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF | ≤ 5% 0201 ≥ 0.01uF;1210 ≥ 3.3μF | ≤ 10% 0402 ≥ 0.012μF;0603>0.1μF;0805 ≥ 1μF(0805/X7R>0.47μF); 1206 ≥ 2.2μF;1210 ≥ 10μF;TT series | 35V | ≤ 3.5% | ≤ 12.5% 1206/X5R=10μF | ≤ 10% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF | ≤ 5% 0201 ≥ 0.01μF(0201/X5R=0.01μF);0805 ≥ 1μF;1210 ≥ 10μF* | 25V | ≤ 3.5% | ≤ 7% 0603 ≥ 0.33μF | ≤ 10% 0201 ≥ 0.1μF(0201/X5R>0.01μF);0603 ≥ 0.47μF;TT series; 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF);0805 ≥ 2.2μF; 1206 ≥ 4.7μF;1210 ≥ 22μF(1210/X5R ≥ 10μF)* | ≤ 12.5% 0402 ≥ 0.47μF;0805/X5R/X6S=10μF | 16V | ≤ 3.5% | ≤ 5% 0201 ≥ 0.01μF(0201/X5R=0.01μF);0402 ≥ 0.033μF; 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF | ≤ 10% 0201 ≥ 0.1μF(0201/X5R>0.01μF;0201/X7R ≥ 0.022μF);0402 ≥ 0.22uF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF;TT series | ≤ 12.5% 0402/X5R ≥ 1μF;0402/X6S=1μF;0805/X5R/X6S=10μF | 10V | ≤ 5% | ≤ 10% 0201 ≥ 0.012μF;0402 ≥ 0.22μF;0603 ≥ 0.33μF;TT series; 0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF;01R5/X5R | ≤ 12.5% 0805/X5R/X6S=10μF | ≤ 15% 0201 ≥ 0.1μF(0201/X5R>0.1μF);0402 ≥ 1μF;0603/X5R ≥ 10μF | 6.3V | ≤ 10% | ≤ 15% 0201 ≥ 0.1μF(0201/X5R>0.1μF);0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF;0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF;TT series | ≤ 20% 0402 ≥ 2.2μF | 4V | ≤ 15% | --- | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | ≥ 50V | ≤ 5% | ≤ 7% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF; TT series | ≤ 12.5% 1210 ≥ 6.8μF | 35V | ≤ 7% | --- | 25V | ≤ 5% | ≤ 7% 0402 ≥ 0.047μF;0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF | ≤ 9% 0402 ≥ 0.068μF;0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series | ≤ 9% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF | 16V (C<1.0μF) | ≤ 7% | ≤ 12.5% 0402 ≥ 0.22μF | 16V (C ≥ 1.0μF) | ≤ 9% | ≤ 12.5% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF;1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF; TT series | 10V | ≤ 12.5% | ≤ 20% 0402 ≥ 0.47μF | 6.3V | ≤ 20% | --- |
| | | | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | ≥ 100V | ≤ 2.5% | ≤ 3% 1206 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | ≤ 5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF;TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | ≤ 10% 0805 > 0.22μF;1210 ≥ 3.3μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 50V | ≤ 2.5% | ≤ 3% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | ≤ 5% 0201 ≥ 0.01uF;1210 ≥ 3.3μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | ≤ 10% 0402 ≥ 0.012μF;0603>0.1μF;0805 ≥ 1μF(0805/X7R>0.47μF); 1206 ≥ 2.2μF;1210 ≥ 10μF;TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 35V | ≤ 3.5% | ≤ 12.5% 1206/X5R=10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | ≤ 10% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | ≤ 5% 0201 ≥ 0.01μF(0201/X5R=0.01μF);0805 ≥ 1μF;1210 ≥ 10μF* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 25V | ≤ 3.5% | ≤ 7% 0603 ≥ 0.33μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | ≤ 10% 0201 ≥ 0.1μF(0201/X5R>0.01μF);0603 ≥ 0.47μF;TT series; 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF);0805 ≥ 2.2μF; 1206 ≥ 4.7μF;1210 ≥ 22μF(1210/X5R ≥ 10μF)* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | ≤ 12.5% 0402 ≥ 0.47μF;0805/X5R/X6S=10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 16V | ≤ 3.5% | ≤ 5% 0201 ≥ 0.01μF(0201/X5R=0.01μF);0402 ≥ 0.033μF; 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≤ 10% 0201 ≥ 0.1μF(0201/X5R>0.01μF;0201/X7R ≥ 0.022μF);0402 ≥ 0.22uF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF;TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≤ 12.5% 0402/X5R ≥ 1μF;0402/X6S=1μF;0805/X5R/X6S=10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤ 5% | ≤ 10% 0201 ≥ 0.012μF;0402 ≥ 0.22μF;0603 ≥ 0.33μF;TT series; 0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF;01R5/X5R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤ 12.5% 0805/X5R/X6S=10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤ 15% 0201 ≥ 0.1μF(0201/X5R>0.1μF);0402 ≥ 1μF;0603/X5R ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤ 10% | ≤ 15% 0201 ≥ 0.1μF(0201/X5R>0.1μF);0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF;0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF;TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤ 20% 0402 ≥ 2.2μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4V | ≤ 15% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥ 50V | ≤ 5% | ≤ 7% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤ 12.5% 1210 ≥ 6.8μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤ 7% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤ 5% | ≤ 7% 0402 ≥ 0.047μF;0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤ 9% 0402 ≥ 0.068μF;0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤ 9% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C<1.0μF) | ≤ 7% | ≤ 12.5% 0402 ≥ 0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C ≥ 1.0μF) | ≤ 9% | ≤ 12.5% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF;1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤ 12.5% | ≤ 20% 0402 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤ 20% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4. | Dielectric Strength | <p>To apply voltage: ≤ 100V: 250% of rated voltage. 200V ~ 300V: 200% of rated voltage. 400V ~ 450V: 120% of rated voltage. 500V ~ 999V: 150% of rated voltage. 1000V ~ 3000V: 120% of rated voltage. 4000V: 110% of rated voltage.</p> <p>*Duration: 1 to 5 sec. *Charge & discharge current less than 50mA.</p> | * No evidence of damage or flash over during test. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

| No. | Item | Test Condition | Requirements | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------------------|--------------------|-----------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|------------------------------------|-------------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------------------------------|-------------------|--------------------|-----------------------------------------------------------|------------------|------------------------------------------------------------------------|---------------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------------------------|---------------------------------------------|----------------------|---------------------------|--|
| 5. | Insulation Resistance | *Test temp.: Room Temperature. | 10GΩ or RxC ≥ 500Ω-F whichever is smaller. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | *To apply rated voltage for MAX. 120sec. | Class II (X7R, X7E, X5R, X6S, X7S, Y5V): | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R</td> <td rowspan="6">10GΩ or RxC ≥ 100 Ω-F whichever is smaller.</td> </tr> <tr> <td>50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF</td> </tr> <tr> <td>35V: 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td> </tr> <tr> <td>25V: 0402 ≥ 1μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF</td> </tr> <tr> <td>16V: 0201 ≥ 0.1μF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF</td> </tr> <tr> <td>10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF</td> </tr> <tr> <td>6.3V ; 4V ; TT series; Size ≥ 1812</td> <td></td> </tr> <tr> <td></td> <td> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>All X6S items, All X7S items</td> <td rowspan="8">RxC ≥ 50 Ω-F.</td> </tr> <tr> <td>100V: 1210 ≥ 3.3μF</td> </tr> <tr> <td>50V: 0402 ≥ 0.1μF; 0603 ≥ 2.2μF; 0805 ≥ 10μF; 1206 ≥ 10μF</td> </tr> <tr> <td>35V: 0603 ≥ 1μF;</td> </tr> <tr> <td>25V: 0201 ≥ 0.1μF; 0402 ≥ 2.2μF; 0603 ≥ 10μF; 0805 ≥ 10μF; 1206 ≥ 22μF</td> </tr> <tr> <td>16V: 0603 ≥ 10μF; 0402 ≥ 1μF; 0201 ≥ 0.22μF</td> </tr> <tr> <td>10V: 0201 > 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 47μF; TT21 > 4.7μF</td> </tr> <tr> <td>6.3V: 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 > 4.7μF; 0805 ≥ 47μF; 1206 ≥ 10μF; 4V: 0603 ≥ 2.2μF; 0805 ≥ 47μF; 1206 ≥ 10μF</td> </tr> </tbody> </table> </td> </tr> <tr> <td>Rated voltage: 200~630V</td> <td>To apply rated voltage (500V max.) for 60 sec.</td> <td>≥ 10GΩ or RxC ≥ 100Ω-F whichever is smaller</td> </tr> <tr> <td>Rated voltage: >630V</td> <td>To apply 500V for 60 sec.</td> <td></td> </tr> </tbody> </table> | Rated voltage | Insulation Resistance | 100V: All X7R | 10GΩ or RxC ≥ 100 Ω-F whichever is smaller. | 50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF | 35V: 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF | 25V: 0402 ≥ 1μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF | 16V: 0201 ≥ 0.1μF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF | 10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF | 6.3V ; 4V ; TT series; Size ≥ 1812 | | | <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>All X6S items, All X7S items</td> <td rowspan="8">RxC ≥ 50 Ω-F.</td> </tr> <tr> <td>100V: 1210 ≥ 3.3μF</td> </tr> <tr> <td>50V: 0402 ≥ 0.1μF; 0603 ≥ 2.2μF; 0805 ≥ 10μF; 1206 ≥ 10μF</td> </tr> <tr> <td>35V: 0603 ≥ 1μF;</td> </tr> <tr> <td>25V: 0201 ≥ 0.1μF; 0402 ≥ 2.2μF; 0603 ≥ 10μF; 0805 ≥ 10μF; 1206 ≥ 22μF</td> </tr> <tr> <td>16V: 0603 ≥ 10μF; 0402 ≥ 1μF; 0201 ≥ 0.22μF</td> </tr> <tr> <td>10V: 0201 > 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 47μF; TT21 > 4.7μF</td> </tr> <tr> <td>6.3V: 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 > 4.7μF; 0805 ≥ 47μF; 1206 ≥ 10μF; 4V: 0603 ≥ 2.2μF; 0805 ≥ 47μF; 1206 ≥ 10μF</td> </tr> </tbody> </table> | Rated voltage | Insulation Resistance | All X6S items, All X7S items | RxC ≥ 50 Ω-F. | 100V: 1210 ≥ 3.3μF | 50V: 0402 ≥ 0.1μF; 0603 ≥ 2.2μF; 0805 ≥ 10μF; 1206 ≥ 10μF | 35V: 0603 ≥ 1μF; | 25V: 0201 ≥ 0.1μF; 0402 ≥ 2.2μF; 0603 ≥ 10μF; 0805 ≥ 10μF; 1206 ≥ 22μF | 16V: 0603 ≥ 10μF; 0402 ≥ 1μF; 0201 ≥ 0.22μF | 10V: 0201 > 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 47μF; TT21 > 4.7μF | 6.3V: 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 > 4.7μF; 0805 ≥ 47μF; 1206 ≥ 10μF; 4V: 0603 ≥ 2.2μF; 0805 ≥ 47μF; 1206 ≥ 10μF | Rated voltage: 200~630V | To apply rated voltage (500V max.) for 60 sec. | ≥ 10GΩ or RxC ≥ 100Ω-F whichever is smaller | Rated voltage: >630V | To apply 500V for 60 sec. | |
| | | Rated voltage | Insulation Resistance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100V: All X7R | 10GΩ or RxC ≥ 100 Ω-F whichever is smaller. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V: 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V: 0402 ≥ 1μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V: 0201 ≥ 0.1μF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V ; 4V ; TT series; Size ≥ 1812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>All X6S items, All X7S items</td> <td rowspan="8">RxC ≥ 50 Ω-F.</td> </tr> <tr> <td>100V: 1210 ≥ 3.3μF</td> </tr> <tr> <td>50V: 0402 ≥ 0.1μF; 0603 ≥ 2.2μF; 0805 ≥ 10μF; 1206 ≥ 10μF</td> </tr> <tr> <td>35V: 0603 ≥ 1μF;</td> </tr> <tr> <td>25V: 0201 ≥ 0.1μF; 0402 ≥ 2.2μF; 0603 ≥ 10μF; 0805 ≥ 10μF; 1206 ≥ 22μF</td> </tr> <tr> <td>16V: 0603 ≥ 10μF; 0402 ≥ 1μF; 0201 ≥ 0.22μF</td> </tr> <tr> <td>10V: 0201 > 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 47μF; TT21 > 4.7μF</td> </tr> <tr> <td>6.3V: 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 > 4.7μF; 0805 ≥ 47μF; 1206 ≥ 10μF; 4V: 0603 ≥ 2.2μF; 0805 ≥ 47μF; 1206 ≥ 10μF</td> </tr> </tbody> </table> | Rated voltage | Insulation Resistance | All X6S items, All X7S items | RxC ≥ 50 Ω-F. | 100V: 1210 ≥ 3.3μF | 50V: 0402 ≥ 0.1μF; 0603 ≥ 2.2μF; 0805 ≥ 10μF; 1206 ≥ 10μF | 35V: 0603 ≥ 1μF; | 25V: 0201 ≥ 0.1μF; 0402 ≥ 2.2μF; 0603 ≥ 10μF; 0805 ≥ 10μF; 1206 ≥ 22μF | 16V: 0603 ≥ 10μF; 0402 ≥ 1μF; 0201 ≥ 0.22μF | 10V: 0201 > 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 47μF; TT21 > 4.7μF | 6.3V: 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 > 4.7μF; 0805 ≥ 47μF; 1206 ≥ 10μF; 4V: 0603 ≥ 2.2μF; 0805 ≥ 47μF; 1206 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | |
| Rated voltage | Insulation Resistance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| All X6S items, All X7S items | RxC ≥ 50 Ω-F. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100V: 1210 ≥ 3.3μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V: 0402 ≥ 0.1μF; 0603 ≥ 2.2μF; 0805 ≥ 10μF; 1206 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V: 0603 ≥ 1μF; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V: 0201 ≥ 0.1μF; 0402 ≥ 2.2μF; 0603 ≥ 10μF; 0805 ≥ 10μF; 1206 ≥ 22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V: 0603 ≥ 10μF; 0402 ≥ 1μF; 0201 ≥ 0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V: 0201 > 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 47μF; TT21 > 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V: 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 > 4.7μF; 0805 ≥ 47μF; 1206 ≥ 10μF; 4V: 0603 ≥ 2.2μF; 0805 ≥ 47μF; 1206 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated voltage: 200~630V | To apply rated voltage (500V max.) for 60 sec. | ≥ 10GΩ or RxC ≥ 100Ω-F whichever is smaller | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated voltage: >630V | To apply 500V for 60 sec. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6. | Temperature Coefficient | With no electrical load. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>T.C.</th> <th>Operating Temp</th> </tr> </thead> <tbody> <tr> <td>NPO</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X7R</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X7S</td> <td>-55 ~ 125°C at 25°C</td> </tr> <tr> <td>X5R</td> <td>-55~ 85°C at 25°C</td> </tr> <tr> <td>X6S</td> <td>-55~105°C at 25°C</td> </tr> <tr> <td>Y5V</td> <td>-25~ 85°C at 20°C</td> </tr> </tbody> </table> | T.C. | Operating Temp | NPO | -55~125°C at 25°C | X7R | -55~125°C at 25°C | X7S | -55 ~ 125°C at 25°C | X5R | -55~ 85°C at 25°C | X6S | -55~105°C at 25°C | Y5V | -25~ 85°C at 20°C | <table border="1"> <thead> <tr> <th>T.C.</th> <th>Capacitance Change</th> </tr> </thead> <tbody> <tr> <td>NPO</td> <td>Within ±30ppm/°C</td> </tr> <tr> <td>X7R</td> <td>Within ±15%</td> </tr> <tr> <td>X7S</td> <td>Within ±22%</td> </tr> <tr> <td>X5R</td> <td>Within ±15%</td> </tr> <tr> <td>X6S</td> <td>Within ±22%</td> </tr> <tr> <td>Y5V</td> <td>Within +30%/-80%</td> </tr> </tbody> </table> | T.C. | Capacitance Change | NPO | Within ±30ppm/°C | X7R | Within ±15% | X7S | Within ±22% | X5R | Within ±15% | X6S | Within ±22% | Y5V | Within +30%/-80% | | |
| T.C. | Operating Temp | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NPO | -55~125°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X7R | -55~125°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X7S | -55 ~ 125°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X5R | -55~ 85°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X6S | -55~105°C at 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Y5V | -25~ 85°C at 20°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T.C. | Capacitance Change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NPO | Within ±30ppm/°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X7R | Within ±15% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X7S | Within ±22% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X5R | Within ±15% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X6S | Within ±22% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Y5V | Within +30%/-80% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | *Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | * Measurement voltage for Class II: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>01005</th> <th>0201</th> </tr> </thead> <tbody> <tr> <td>Cap ≤ 0.01μF: 0.5V</td> <td>Cap < 0.1μF: 1V</td> </tr> <tr> <td>Cap > 0.01μF: 0.2V</td> <td>0.1μF ≤ Cap < 1μF: 0.2V*</td> </tr> <tr> <td></td> <td>Cap ≥ 1μF: 0.1V*</td> </tr> <tr> <td>*0201X104/6.3V~25V: 0.5V 0201X224/10V: 0.5V</td> <td>*0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V</td> </tr> <tr> <th>0402</th> <th>0603</th> </tr> <tr> <td>Cap < 1μF: 1V</td> <td>Cap < 1μF: 1V</td> </tr> <tr> <td>Cap = 1μF: 0.5V** 0402B224-16V: 0.5V 0402B474-10V: 0.5V 0402X475M6R3: 0.5V</td> <td>1μF ≤ Cap ≤ 4.7μF: 0.5V</td> </tr> <tr> <td>1μF < Cap < 10μF: 0.2V **0402B105M6R3V: 0.2V</td> <td>Cap > 4.7μF: 0.2V</td> </tr> <tr> <td>Cap ≥ 10μF: 0.1V</td> <td></td> </tr> <tr> <th>0805</th> <th>1206/1210</th> </tr> <tr> <td>Cap < 10μF: 1V</td> <td>Caps ≤ 10μF: 1V</td> </tr> <tr> <td>Cap = 10μF: 0.5V 0805B475/6.3V~25V: 0.5V</td> <td>10μF < Cap ≤ 100μF: 0.5V</td> </tr> <tr> <td>Cap > 10μF: 0.2V</td> <td>Cap > 100μF: 0.2V</td> </tr> </tbody> </table> | 01005 | 0201 | Cap ≤ 0.01μF: 0.5V | Cap < 0.1μF: 1V | Cap > 0.01μF: 0.2V | 0.1μF ≤ Cap < 1μF: 0.2V* | | Cap ≥ 1μF: 0.1V* | *0201X104/6.3V~25V: 0.5V 0201X224/10V: 0.5V | *0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V | 0402 | 0603 | Cap < 1μF: 1V | Cap < 1μF: 1V | Cap = 1μF: 0.5V** 0402B224-16V: 0.5V 0402B474-10V: 0.5V 0402X475M6R3: 0.5V | 1μF ≤ Cap ≤ 4.7μF: 0.5V | 1μF < Cap < 10μF: 0.2V **0402B105M6R3V: 0.2V | Cap > 4.7μF: 0.2V | Cap ≥ 10μF: 0.1V | | 0805 | 1206/1210 | Cap < 10μF: 1V | Caps ≤ 10μF: 1V | Cap = 10μF: 0.5V 0805B475/6.3V~25V: 0.5V | 10μF < Cap ≤ 100μF: 0.5V | Cap > 10μF: 0.2V | Cap > 100μF: 0.2V | | | |
| 01005 | 0201 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cap ≤ 0.01μF: 0.5V | Cap < 0.1μF: 1V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cap > 0.01μF: 0.2V | 0.1μF ≤ Cap < 1μF: 0.2V* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Cap ≥ 1μF: 0.1V* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| *0201X104/6.3V~25V: 0.5V 0201X224/10V: 0.5V | *0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0402 | 0603 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cap < 1μF: 1V | Cap < 1μF: 1V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cap = 1μF: 0.5V** 0402B224-16V: 0.5V 0402B474-10V: 0.5V 0402X475M6R3: 0.5V | 1μF ≤ Cap ≤ 4.7μF: 0.5V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1μF < Cap < 10μF: 0.2V **0402B105M6R3V: 0.2V | Cap > 4.7μF: 0.2V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cap ≥ 10μF: 0.1V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0805 | 1206/1210 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cap < 10μF: 1V | Caps ≤ 10μF: 1V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cap = 10μF: 0.5V 0805B475/6.3V~25V: 0.5V | 10μF < Cap ≤ 100μF: 0.5V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cap > 10μF: 0.2V | Cap > 100μF: 0.2V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

| No. | Item | Test Condition | Requirements | | | | | | | | | | | | | | | |
|------|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------|---|----------------------------|------------|---|------------|-----|---|----------------------------|------------|---|------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7. | Adhesive Strength of Termination | <ul style="list-style-type: none"> * Pressurizing force : 2N (0201) and 5N (\leq0603) and 10N ($>$0603) * Test time: 10\pm1 sec. | <ul style="list-style-type: none"> * No remarkable damage or removal of the terminations. | | | | | | | | | | | | | | | |
| 8. | Vibration Resistance | <ul style="list-style-type: none"> * Vibration frequency: 10~55 Hz/min. * Total amplitude: 1.5mm * Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.) * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24\pm 2 hrs at room temp. * Cap./DF(Q) Measurement to be made after de-aging at 150°C for 1hr then set for 24\pm2 hrs at room temp. | <ul style="list-style-type: none"> * No remarkable damage. * Cap change and Q/D.F.: To meet initial spec. | | | | | | | | | | | | | | | |
| 9. | Solderability | <ul style="list-style-type: none"> * Solder temperature: 235\pm5°C * Dipping time: 2\pm0.5 sec. | <ul style="list-style-type: none"> * 75% min. coverage of all metalized area. | | | | | | | | | | | | | | | |
| 10. | Bending Test | <ul style="list-style-type: none"> * The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 5 mm and then the pressure shall be maintained for 5\pm1 sec. * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24\pm 2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24\pm2 hrs. | <ul style="list-style-type: none"> * No remarkable damage. * Cap change : NP0: within \pm5% or 0.5pF whichever is larger X7R, X5R, X6S, X7S: within \pm12.5% Y5V: within \pm30% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.) | | | | | | | | | | | | | | | |
| 11. | Resistance to Soldering Heat | <ul style="list-style-type: none"> * Solder temperature: 260\pm5°C * Dipping time: 10\pm1 sec * Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder. * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24\pm2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24\pm2 hrs at room temp. | <ul style="list-style-type: none"> * No remarkable damage. * Cap change: NP0: within \pm2.5% or 0.25pF whichever is larger X7R, X5R, X6S, X7S: within \pm7.5% Y5V: within \pm20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. * 25% max. leaching on each edge. | | | | | | | | | | | | | | | |
| 12. | Temperature Cycle | <ul style="list-style-type: none"> * Conduct the five cycles according to the temperatures and time. <table border="1"> <thead> <tr> <th>Step</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. operating temp. +0/-3</td> <td>30\pm3</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>2~3</td> </tr> <tr> <td>3</td> <td>Max. operating temp. +3/-0</td> <td>30\pm3</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>2~3</td> </tr> </tbody> </table> <ul style="list-style-type: none"> * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24\pm2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24\pm2 hrs at room temp. | Step | Temp. (°C) | Time (min.) | 1 | Min. operating temp. +0/-3 | 30 \pm 3 | 2 | Room temp. | 2~3 | 3 | Max. operating temp. +3/-0 | 30 \pm 3 | 4 | Room temp. | 2~3 | <ul style="list-style-type: none"> * No remarkable damage. * Cap change : NP0: within \pm2.5% or 0.25pF whichever is larger X7R, X5R, X6S, X7S: within \pm7.5% Y5V: within \pm20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. |
| Step | Temp. (°C) | Time (min.) | | | | | | | | | | | | | | | | |
| 1 | Min. operating temp. +0/-3 | 30 \pm 3 | | | | | | | | | | | | | | | | |
| 2 | Room temp. | 2~3 | | | | | | | | | | | | | | | | |
| 3 | Max. operating temp. +3/-0 | 30 \pm 3 | | | | | | | | | | | | | | | | |
| 4 | Room temp. | 2~3 | | | | | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

| No. | Item | Test Condition | Requirements | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------------------------------------------------------------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------|---------------------|-------|-----|-------------------|-------------------------------------------------------------------------|----------------------------------|-----|-----|-------------------------------------------------------------|----------------------------------|--------------------------------------------------------------------------------------------------------|-----|-----|----------------------------------------------------------|-----|-----|---------------------------------------------------------------|--------------------|----------------------------------------------------------------|-----|-----|----------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------|-----|-------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------|------|------|-------------------------------------------------------------------------------------------------------------------|----|------|-----|------------|--------|---------------------|------|-------|-----------------------------------|--------------|-------------------|-----|------|-----|-----|-------|----------------------------------------------------------------------------|---------------------------------------------------------------|--------------------------------------|-----------------|------|--------------------|-----------------|--------|-------------------------------------------------------------------------|-----|------|--------------------|------|------|-----|---------------|-----------------------|-----------------------------|-------------------------------------------|------------------------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|--------------------------------------------------------|
| 13. | Humidity (Damp Heat) Steady State | *Test temp.: 40±2°C *Humidity: 90~95%RH *Test time: 500+24/-0hrs. *Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. | * No remarkable damage. * Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X5R, X6S, X7S: ≥10V**, within ±12.5%; ≤6.3V within ±25%; TT series & C ≥ 1uF, within ±25% **10V: 0603 ≥ 4.7μF; 0402 ≥ 1μF; 0201 ≥ 0.1μF, within ±25%; Y5V: ≥10V, within ±30%; ≤6.3V, within +30/-40% * Q/D.F. value: NP0: More than 30pF Q≥350, 10pF≤C≤30pF, Q≥275+2.5C Less than 10pF Q≥200+10C X7R, X5R, X6S, X7S: <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th>Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥100V</td> <td rowspan="3">≤3%</td> <td>≤6% 1206 ≥ 0.47μF</td> </tr> <tr> <td>≤7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF; TT series</td> </tr> <tr> <td>≤20% 0805 > 0.22μF; 1210 ≥ 3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤3%</td> <td>≤6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td> </tr> <tr> <td>≤10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF</td> </tr> <tr> <td>≤20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤5%</td> <td>≤10% 0201 ≥ 0.01μF(0201/X5R=0.01μF); 0805 ≥ 1μF; 1210 ≥ 10μF*</td> </tr> <tr> <td>≤14% 0603 ≥ 0.33μF</td> </tr> <tr> <td>≤15% 0201 ≥ 0.1μF(0201/X5R > 0.01μF); 0603 ≥ 0.47μF; TT series</td> </tr> <tr> <td rowspan="3">16V</td> <td rowspan="3">≤5%</td> <td>≤15% 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF); 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF(1210/X5R ≥ 10μF)*;</td> </tr> <tr> <td>≤20% 0402 ≥ 0.47μF</td> </tr> <tr> <td>≤10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td> </tr> <tr> <td rowspan="3">10V</td> <td rowspan="3">≤7.5%</td> <td>≤15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF); 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series</td> </tr> <tr> <td>≤20% 0201 ≥ 0.012μF; 0402 ≥ 0.22μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF</td> </tr> <tr> <td>≤20% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603/X5R ≥ 10μF; TT series; 01R5/X5R</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30% 0201 ≥ 0.1μF; 0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF; TT series</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> </tr> </tbody> </table> <p>Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th>Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥50V</td> <td rowspan="3">≤7.5%</td> <td>≤10% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF;</td> </tr> <tr> <td>1206 ≥ 4.7μF</td> </tr> <tr> <td>≤20% 1210 ≥ 6.8μF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤7.5%</td> <td>≤10% 0402 ≥ 0.047μF; 0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF</td> </tr> <tr> <td>≤15% 0402 ≥ 0.068μF; 0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td> </tr> <tr> <td>≤12.5% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF</td> </tr> <tr> <td>16V (C < 1.0μF)</td> <td>≤10%</td> <td>≤20% 0402 ≥ 0.22μF</td> </tr> <tr> <td>16V (C ≥ 1.0μF)</td> <td>≤12.5%</td> <td>≤20% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF;</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30% 0402 ≥ 0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> </tr> </tbody> </table> <p>*I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X5R, X6S, X7S, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R; 1210 ≥ 3.3μF</td> <td rowspan="7">1GΩ or RxC ≥ 10 Ω-F whichever is smaller.</td> </tr> <tr> <td>50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF</td> </tr> <tr> <td>35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td> </tr> <tr> <td>25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF</td> </tr> <tr> <td>16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF</td> </tr> <tr> <td>10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF</td> </tr> <tr> <td>6.3V ; 4V ; TT series ; All X6S/X7S items; Size ≥ 1812</td> </tr> </tbody> </table> | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | ≥100V | ≤3% | ≤6% 1206 ≥ 0.47μF | ≤7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF; TT series | ≤20% 0805 > 0.22μF; 1210 ≥ 3.3μF | 50V | ≤3% | ≤6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF | ≤10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF | ≤20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series | 35V | ≤5% | ≤20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF | 25V | ≤5% | ≤10% 0201 ≥ 0.01μF(0201/X5R=0.01μF); 0805 ≥ 1μF; 1210 ≥ 10μF* | ≤14% 0603 ≥ 0.33μF | ≤15% 0201 ≥ 0.1μF(0201/X5R > 0.01μF); 0603 ≥ 0.47μF; TT series | 16V | ≤5% | ≤15% 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF); 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF(1210/X5R ≥ 10μF)*; | ≤20% 0402 ≥ 0.47μF | ≤10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF | 10V | ≤7.5% | ≤15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF); 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series | ≤20% 0201 ≥ 0.012μF; 0402 ≥ 0.22μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF | ≤20% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603/X5R ≥ 10μF; TT series; 01R5/X5R | 6.3V | ≤15% | ≤30% 0201 ≥ 0.1μF; 0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF; TT series | 4V | ≤20% | --- | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | ≥50V | ≤7.5% | ≤10% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF; | 1206 ≥ 4.7μF | ≤20% 1210 ≥ 6.8μF | 35V | ≤10% | --- | 25V | ≤7.5% | ≤10% 0402 ≥ 0.047μF; 0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF | ≤15% 0402 ≥ 0.068μF; 0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF | ≤12.5% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF | 16V (C < 1.0μF) | ≤10% | ≤20% 0402 ≥ 0.22μF | 16V (C ≥ 1.0μF) | ≤12.5% | ≤20% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF; | 10V | ≤20% | ≤30% 0402 ≥ 0.47μF | 6.3V | ≤30% | --- | Rated voltage | Insulation Resistance | 100V: All X7R; 1210 ≥ 3.3μF | 1GΩ or RxC ≥ 10 Ω-F whichever is smaller. | 50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF | 35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF | 25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF | 16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF | 10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF | 6.3V ; 4V ; TT series ; All X6S/X7S items; Size ≥ 1812 |
| Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥100V | ≤3% | ≤6% 1206 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0805 > 0.22μF; 1210 ≥ 3.3μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V | ≤3% | ≤6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤5% | ≤20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤5% | ≤10% 0201 ≥ 0.01μF(0201/X5R=0.01μF); 0805 ≥ 1μF; 1210 ≥ 10μF* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤14% 0603 ≥ 0.33μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% 0201 ≥ 0.1μF(0201/X5R > 0.01μF); 0603 ≥ 0.47μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V | ≤5% | ≤15% 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF); 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF(1210/X5R ≥ 10μF)*; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0402 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤7.5% | ≤15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF); 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0201 ≥ 0.012μF; 0402 ≥ 0.22μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603/X5R ≥ 10μF; TT series; 01R5/X5R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤15% | ≤30% 0201 ≥ 0.1μF; 0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4V | ≤20% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤7.5% | ≤10% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 1206 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 1210 ≥ 6.8μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤10% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤7.5% | ≤10% 0402 ≥ 0.047μF; 0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% 0402 ≥ 0.068μF; 0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤12.5% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C < 1.0μF) | ≤10% | ≤20% 0402 ≥ 0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C ≥ 1.0μF) | ≤12.5% | ≤20% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤20% | ≤30% 0402 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤30% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated voltage | Insulation Resistance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100V: All X7R; 1210 ≥ 3.3μF | 1GΩ or RxC ≥ 10 Ω-F whichever is smaller. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V ; 4V ; TT series ; All X6S/X7S items; Size ≥ 1812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

| No | Item | Test Condition | Requirements | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------|------------------------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------|-----|-------|----------------------------------------------------------------------------|---------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|---------------|------|----------------------------------------------------------|-----------------------------------------------------------------|--------------------|-------------------------------------------------------------------------|-----|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------|-----|-----|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-----|-------|---------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------|------|----------|----|------|-----|
| 14 | Humidity (Damp Heat) Load | *Test temp. : 40±2℃ | * No remarkable damage. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | *Humidity : 90~95%RH | Cap change: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | *Test time : 500+24/-0 hrs. | NP0: ±7.5% or 0.75pF whichever is larger. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | *To apply voltage : | X7R, X5R, X6S, X7S: ≥10V**, within ±12.5%; ≤6.3V within ±25%; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Rated voltage (MAX. 500V) | TT series & C≥ 1uF, within ±25% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | *Before initial measurement (Class II only): To apply de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp. | **10V: 0603 ≥ 4.7μF; 0402 ≥ 1μF; 0201 ≥ 0.1μF, within ±25%; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp. | Y5V: ≥10V, within ±30%; ≤6.3V, within +30/-40% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | Q/D.F. value: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | NP0: C≥30pF, Q≥200; C<30pF, Q≥100+10/3C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | X7R, X5R, X6S, X7S: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th>Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥100V</td> <td rowspan="3">≤3%</td> <td>≤6% 1206 ≥ 0.47μF</td> </tr> <tr> <td>≤7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF; TT series</td> </tr> <tr> <td>≤20% 0805 > 0.22μF; 1210 ≥ 3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤3%</td> <td>≤6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td> </tr> <tr> <td>≤10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF</td> </tr> <tr> <td>≤20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series</td> </tr> <tr> <td rowspan="3">35V</td> <td rowspan="3">≤5%</td> <td>≤20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td> </tr> <tr> <td>≤10% 0201 ≥ 0.01μF(0201/X5R = 0.01μF); 0805 ≥ 1μF; 1210 ≥ 10μF*</td> </tr> <tr> <td>≤14% 0603 ≥ 0.33μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤5%</td> <td>≤10% 0201 ≥ 0.1μF(0201/X5R > 0.01μF); 0603 ≥ 0.47μF; TT series</td> </tr> <tr> <td>≤15% 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF); 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF(1210/X5R ≥ 10μF)*;</td> </tr> <tr> <td>≤20% 0402 ≥ 0.47μF</td> </tr> <tr> <td>≤10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF); 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series</td> </tr> <tr> <td>≤15% 0201 ≥ 0.012μF; 0402 ≥ 0.22μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603/X5R ≥ 10μF; TT series; 01R5/X5R</td> </tr> <tr> <td>≤20% 0201 ≥ 0.1μF; 0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF; TT series</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30% ---</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> </tr> </tbody> </table> | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | ≥100V | ≤3% | ≤6% 1206 ≥ 0.47μF | ≤7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF; TT series | ≤20% 0805 > 0.22μF; 1210 ≥ 3.3μF | 50V | ≤3% | ≤6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF | ≤10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF | ≤20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series | 35V | ≤5% | ≤20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF | ≤10% 0201 ≥ 0.01μF(0201/X5R = 0.01μF); 0805 ≥ 1μF; 1210 ≥ 10μF* | ≤14% 0603 ≥ 0.33μF | 25V | ≤5% | ≤10% 0201 ≥ 0.1μF(0201/X5R > 0.01μF); 0603 ≥ 0.47μF; TT series | ≤15% 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF); 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF(1210/X5R ≥ 10μF)*; | ≤20% 0402 ≥ 0.47μF | ≤10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF | 16V | ≤5% | ≤15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF); 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series | ≤15% 0201 ≥ 0.012μF; 0402 ≥ 0.22μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF | 10V | ≤7.5% | ≤15% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603/X5R ≥ 10μF; TT series; 01R5/X5R | ≤20% 0201 ≥ 0.1μF; 0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF; TT series | 6.3V | ≤15% | ≤30% --- | 4V | ≤20% | --- |
| | | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≥100V | ≤3% | ≤6% 1206 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | ≤7.5% 0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | ≤20% 0805 > 0.22μF; 1210 ≥ 3.3μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V | ≤3% | ≤6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤5% | ≤20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 0201 ≥ 0.01μF(0201/X5R = 0.01μF); 0805 ≥ 1μF; 1210 ≥ 10μF* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤14% 0603 ≥ 0.33μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤5% | ≤10% 0201 ≥ 0.1μF(0201/X5R > 0.01μF); 0603 ≥ 0.47μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF); 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF(1210/X5R ≥ 10μF)*; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0402 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V | ≤5% | ≤15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF); 0402 ≥ 0.033μF; 0603 > 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% 0201 ≥ 0.012μF; 0402 ≥ 0.22μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤7.5% | ≤15% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603/X5R ≥ 10μF; TT series; 01R5/X5R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 0201 ≥ 0.1μF; 0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤15% | ≤30% --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4V | ≤20% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Y5V: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th>Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥50V</td> <td rowspan="2">≤7.5%</td> <td>≤10% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF</td> </tr> <tr> <td>≤20% 1210 ≥ 6.8μF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤7.5%</td> <td>≤10% 0402 ≥ 0.047μF; 0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF</td> </tr> <tr> <td>≤15% 0402 ≥ 0.068μF; 0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td> </tr> <tr> <td>≤12.5% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF</td> </tr> <tr> <td>16V (C<1.0μF)</td> <td>≤10%</td> <td>≤20% 0402 ≥ 0.22μF</td> </tr> <tr> <td>16V (C≥1.0μF)</td> <td>≤12.5%</td> <td>≤20% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF;</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30% 0402 ≥ 0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> </tr> </tbody> </table> | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | ≥50V | ≤7.5% | ≤10% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF | ≤20% 1210 ≥ 6.8μF | 35V | ≤10% | --- | 25V | ≤7.5% | ≤10% 0402 ≥ 0.047μF; 0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF | ≤15% 0402 ≥ 0.068μF; 0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF | ≤12.5% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF | 16V (C<1.0μF) | ≤10% | ≤20% 0402 ≥ 0.22μF | 16V (C≥1.0μF) | ≤12.5% | ≤20% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF; | 10V | ≤20% | ≤30% 0402 ≥ 0.47μF | 6.3V | ≤30% | --- | | | | | | | | | | | | | |
| Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤7.5% | ≤10% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% 1210 ≥ 6.8μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤10% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤7.5% | ≤10% 0402 ≥ 0.047μF; 0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% 0402 ≥ 0.068μF; 0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤12.5% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C<1.0μF) | ≤10% | ≤20% 0402 ≥ 0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C≥1.0μF) | ≤12.5% | ≤20% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤20% | ≤30% 0402 ≥ 0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤30% | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | *I.R.: ≥10V, 500MΩ or 25 Ω-F whichever is smaller. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Class II (X7R, X5R, X6S, X7S, Y5V) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R; 1210 ≥ 3.3μF</td> <td rowspan="7">500MΩ or RxC ≥ 5 Ω-F whichever is smaller.</td> </tr> <tr> <td>50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF</td> </tr> <tr> <td>35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td> </tr> <tr> <td>25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF</td> </tr> <tr> <td>16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF</td> </tr> <tr> <td>10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF</td> </tr> <tr> <td>6.3V ; 4V ; TT series ; All X6S/X7S items ; Size ≥ 1812</td> </tr> </tbody> </table> | Rated voltage | Insulation Resistance | 100V: All X7R; 1210 ≥ 3.3μF | 500MΩ or RxC ≥ 5 Ω-F whichever is smaller. | 50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF | 35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF | 25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF | 16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF | 10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF | 6.3V ; 4V ; TT series ; All X6S/X7S items ; Size ≥ 1812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated voltage | Insulation Resistance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100V: All X7R; 1210 ≥ 3.3μF | 500MΩ or RxC ≥ 5 Ω-F whichever is smaller. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V ; 4V ; TT series ; All X6S/X7S items ; Size ≥ 1812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35℃, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

| No | Item | Test Condition | Requirements | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------------------------------------------------------------|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|----------------------------|-------------------------------------------|-------------------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------|-----------------|------|----------|----------|----------|-----|-----------|----------|----------|---------|----------|-------------|-----------|---------|------|---------------------|---------|--------|-----------|---------------------|-------------|---------|---------|------|---------------------|------|---------------------|------|----------|------|----------|-----|----------|--------|---------|--------|-----|---------|---------|----------|--------|---------|-----|---------|-----------------|-------------|---------|--------|---------------------|-------------|---------|----------|---------|----------------------|------|-----------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------|---------------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------|----------------------------------------|-----|------|-----|-----|--------------|-------------|---------------------------------------------------------------|-------|---------------------------|------------------------------------------------------------------|------|------------------------------------------------------|------------------------------------------------------|-----------------------------|---------------------------|------|----------------------------------------------------------------------------------------------|--------------|--------|---------------------------------------------------------------|-------------------------------------------------|--------|----------------------------------------------------------|--------------|--------------|------|------|--------------|---------------------------------------------------------|------|-------------------------------------------------------------------------------------------|------|--------------|-----|------|------|------------------------------------------------------|------|----------------------------------------------------------------------------------------------------------------|------|---------------------------------------------------------------------------------|-----|-------|------|--------------------------------------------------------------------------------------------------------|------|-------------------------------------------------------------|-----|-----|------|------|------|--------------------------------------------------------------------------------------------------------|-----|-----|-----|-----|----|------|-----|-----|-----|-----|-----|-----|
| 15. | High Temperature Load (Endurance) | Test temp. : NP0, X7R/X7E/X7S: 125±3°C X6S: 105±3°C X5R, Y5V: 85±3°C Test time: 1000+24/0 hrs. To apply voltage: (1) 100% of rated voltage for below range. | * No remarkable damage. Cap change: NP0: ±3.0% or ±0.3pF whichever is larger X7R, X5R, X6S, X7S: ≥10V**, within ±12.5%; ≤6.3V within ±25%; TT series & C≥1μF, within ±25% **10V: 0603 ≥4.7μF; 0402 ≥1μF; 0201 ≥0.1μF, within ±25%; Y5V: ≥10V, within ±30%; ≤6.3V, within +30/-40% Q/D.F. value: NP0: More than 30pF, Q≥350 10pF≤C<30pF, Q≥275+2.5C Less than 10pF, Q≥200+10C X7R, X5R, X6S, X7S: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectric</th> <th>Rated voltage</th> <th>Capacitance</th> </tr> </thead> <tbody> <tr> <td rowspan="2">0201</td> <td rowspan="2">X5R/X7R/ X6S/X7S</td> <td>≤10V</td> <td>C≥0.1μF</td> </tr> <tr> <td>≥16V</td> <td>C>0.1μF</td> </tr> <tr> <td rowspan="4">0402</td> <td rowspan="2">X5R</td> <td>≤16V</td> <td>C>1.0μF</td> </tr> <tr> <td>25V, 50V</td> <td>C≥1.0μF</td> </tr> <tr> <td rowspan="2">X6S</td> <td>6.3V, 10V</td> <td>C>1.0μF</td> </tr> <tr> <td>16V, 25V</td> <td>C≥1.0μF</td> </tr> <tr> <td></td> <td>X7R/X7S/Y5V</td> <td>6.3V, 10V</td> <td>C≥1.0μF</td> </tr> <tr> <td rowspan="3">0603</td> <td rowspan="2">X5R/X7R/ X6S/X7S</td> <td>4V</td> <td>C≥22μF</td> </tr> <tr> <td>6.3V, 10V</td> <td>C≥4.7μF</td> </tr> <tr> <td>X5R/X6S/X7S</td> <td>25V</td> <td>C≥1.0μF</td> </tr> <tr> <td rowspan="6">0805</td> <td rowspan="3">X5R/X7R/ X6S/X7S</td> <td>35V</td> <td>C≥1.0μF</td> </tr> <tr> <td>4V</td> <td>C≥47μF</td> </tr> <tr> <td>6.3V</td> <td>C≥22μF</td> </tr> <tr> <td rowspan="3">X6S</td> <td>10V, 50V</td> <td>C≥10μF</td> </tr> <tr> <td>16V</td> <td>C>10μF</td> </tr> <tr> <td>25V</td> <td>C≥10μF</td> </tr> <tr> <td>X7R/X7S</td> <td>16V, 25V</td> <td>C≥22μF</td> </tr> <tr> <td>X5R</td> <td></td> <td>C≥10μF</td> </tr> <tr> <td>1206</td> <td>X5R/X7R/X6S</td> <td>≤6.3V</td> <td>C≥47μF</td> </tr> <tr> <td rowspan="2">1210</td> <td rowspan="2">X5R/X7R/X6S</td> <td>16V</td> <td>C≥47μF</td> </tr> <tr> <td>100V</td> <td>C≥3.3μF</td> </tr> <tr> <td>TT15</td> <td>X5R</td> <td>6.3V</td> <td>C>1.0μF</td> </tr> <tr> <td>TT21</td> <td>X5R/X7R/X6S</td> <td>≤10V</td> <td>C≥10μF</td> </tr> </tbody> </table> | Size | Dielectric | Rated voltage | Capacitance | 0201 | X5R/X7R/ X6S/X7S | ≤10V | C≥0.1μF | ≥16V | C>0.1μF | 0402 | X5R | ≤16V | C>1.0μF | 25V, 50V | C≥1.0μF | X6S | 6.3V, 10V | C>1.0μF | 16V, 25V | C≥1.0μF | | X7R/X7S/Y5V | 6.3V, 10V | C≥1.0μF | 0603 | X5R/X7R/ X6S/X7S | 4V | C≥22μF | 6.3V, 10V | C≥4.7μF | X5R/X6S/X7S | 25V | C≥1.0μF | 0805 | X5R/X7R/ X6S/X7S | 35V | C≥1.0μF | 4V | C≥47μF | 6.3V | C≥22μF | X6S | 10V, 50V | C≥10μF | 16V | C>10μF | 25V | C≥10μF | X7R/X7S | 16V, 25V | C≥22μF | X5R | | C≥10μF | 1206 | X5R/X7R/X6S | ≤6.3V | C≥47μF | 1210 | X5R/X7R/X6S | 16V | C≥47μF | 100V | C≥3.3μF | TT15 | X5R | 6.3V | C>1.0μF | TT21 | X5R/X7R/X6S | ≤10V | C≥10μF | <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th colspan="2">Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">100V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>1206 ≥0.47μF</td> </tr> <tr> <td>≤7.5%</td> <td>0603 ≥0.068μF; 0805 >0.1μF; 1206 ≥1μF; 1210 ≥2.2μF; TT series</td> </tr> <tr> <td>≤20%</td> <td>0805 >0.22μF; 1210 ≥3.3μF</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V); 0603 ≥0.047μF; 0805 ≥0.18μF; 1206 ≥0.47μF</td> </tr> <tr> <td>≤10%</td> <td>0201 ≥0.01μF; 1210 ≥3.3μF</td> </tr> <tr> <td>≤20%</td> <td>0402 ≥0.012μF; 0603 >0.1μF; 0805 ≥1μF (0805/X7R >0.47μF); 1206 ≥2.2μF; 1210 ≥10μF; TT series</td> </tr> <tr> <td rowspan="3">35V</td> <td rowspan="3">≤5%</td> <td>≤20%</td> <td>0603 ≥1μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥10μF</td> </tr> <tr> <td>≤10%</td> <td>0201 ≥0.01μF (0201/X5R = 0.01μF); 0805 ≥1μF; 1210 ≥10μF*</td> </tr> <tr> <td>≤14%</td> <td>0603 ≥0.33μF</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤5%</td> <td>≤15%</td> <td>0201 ≥0.1μF (0201/X5R >0.01μF); 0603 ≥0.47μF; TT series</td> </tr> <tr> <td>≤15%</td> <td>0402 ≥0.10μF (0402/X7R ≥0.056μF); 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF (1210/X5R ≥10μF)*;</td> </tr> <tr> <td>≤20%</td> <td>0402 ≥0.47μF</td> </tr> <tr> <td rowspan="3">16V</td> <td rowspan="3">≤15%</td> <td>≤10%</td> <td>0603 ≥0.15μF; 0805 ≥0.68μF; 1206 ≥2.2μF; 1210 ≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0201 ≥0.01μF (0201/X7R ≥0.022μF); 0402 ≥0.033μF; 0603 >0.47μF; 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF; TT series</td> </tr> <tr> <td>≤15%</td> <td>0201 ≥0.012μF; 0402 ≥0.22μF; 0603 ≥0.33μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥22μF</td> </tr> <tr> <td rowspan="3">10V</td> <td rowspan="3">≤7.5%</td> <td>≤15%</td> <td>0201 ≥0.1μF; 0402 ≥1μF (0402/X6S ≥0.47μF); 0603 ≥10μF; 0805 ≥4.7μF; 1206 ≥47μF; 1210 ≥100μF; TT series</td> </tr> <tr> <td>≤20%</td> <td>0201 ≥0.1μF; 0402 ≥1μF; 0603/X5R ≥10μF; TT series; 01R5/X5R</td> </tr> <tr> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="3">6.3V</td> <td rowspan="3">≤15%</td> <td>≤30%</td> <td>0201 ≥0.1μF; 0402 ≥1μF (0402/X6S ≥0.47μF); 0603 ≥10μF; 0805 ≥4.7μF; 1206 ≥47μF; 1210 ≥100μF; TT series</td> </tr> <tr> <td>---</td> <td>---</td> </tr> <tr> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="3">4V</td> <td rowspan="3">≤20%</td> <td>---</td> <td>---</td> </tr> <tr> <td>---</td> <td>---</td> </tr> <tr> <td>---</td> <td>---</td> </tr> </tbody> </table> | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | 100V | ≤3% | ≤6% | 1206 ≥0.47μF | ≤7.5% | 0603 ≥0.068μF; 0805 >0.1μF; 1206 ≥1μF; 1210 ≥2.2μF; TT series | ≤20% | 0805 >0.22μF; 1210 ≥3.3μF | 50V | ≤3% | ≤6% | 0201(50V); 0603 ≥0.047μF; 0805 ≥0.18μF; 1206 ≥0.47μF | ≤10% | 0201 ≥0.01μF; 1210 ≥3.3μF | ≤20% | 0402 ≥0.012μF; 0603 >0.1μF; 0805 ≥1μF (0805/X7R >0.47μF); 1206 ≥2.2μF; 1210 ≥10μF; TT series | 35V | ≤5% | ≤20% | 0603 ≥1μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥10μF | ≤10% | 0201 ≥0.01μF (0201/X5R = 0.01μF); 0805 ≥1μF; 1210 ≥10μF* | ≤14% | 0603 ≥0.33μF | 25V | ≤5% | ≤15% | 0201 ≥0.1μF (0201/X5R >0.01μF); 0603 ≥0.47μF; TT series | ≤15% | 0402 ≥0.10μF (0402/X7R ≥0.056μF); 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF (1210/X5R ≥10μF)*; | ≤20% | 0402 ≥0.47μF | 16V | ≤15% | ≤10% | 0603 ≥0.15μF; 0805 ≥0.68μF; 1206 ≥2.2μF; 1210 ≥4.7μF | ≤15% | 0201 ≥0.01μF (0201/X7R ≥0.022μF); 0402 ≥0.033μF; 0603 >0.47μF; 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF; TT series | ≤15% | 0201 ≥0.012μF; 0402 ≥0.22μF; 0603 ≥0.33μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥22μF | 10V | ≤7.5% | ≤15% | 0201 ≥0.1μF; 0402 ≥1μF (0402/X6S ≥0.47μF); 0603 ≥10μF; 0805 ≥4.7μF; 1206 ≥47μF; 1210 ≥100μF; TT series | ≤20% | 0201 ≥0.1μF; 0402 ≥1μF; 0603/X5R ≥10μF; TT series; 01R5/X5R | --- | --- | 6.3V | ≤15% | ≤30% | 0201 ≥0.1μF; 0402 ≥1μF (0402/X6S ≥0.47μF); 0603 ≥10μF; 0805 ≥4.7μF; 1206 ≥47μF; 1210 ≥100μF; TT series | --- | --- | --- | --- | 4V | ≤20% | --- | --- | --- | --- | --- | --- |
| | | Size | Dielectric | Rated voltage | Capacitance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 0201 | X5R/X7R/ X6S/X7S | ≤10V | C≥0.1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | ≥16V | C>0.1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 0402 | X5R | ≤16V | C>1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 25V, 50V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | X6S | 6.3V, 10V | C>1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 16V, 25V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | X7R/X7S/Y5V | 6.3V, 10V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 0603 | X5R/X7R/ X6S/X7S | 4V | C≥22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 6.3V, 10V | C≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | X5R/X6S/X7S | 25V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 0805 | X5R/X7R/ X6S/X7S | 35V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 4V | C≥47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 6.3V | C≥22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | X6S | 10V, 50V | C≥10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 16V | C>10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 25V | C≥10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | X7R/X7S | 16V, 25V | C≥22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | X5R | | C≥10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 1206 | X5R/X7R/X6S | ≤6.3V | C≥47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 1210 | X5R/X7R/X6S | 16V | C≥47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 100V | C≥3.3μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | TT15 | X5R | 6.3V | C>1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TT21 | X5R/X7R/X6S | ≤10V | C≥10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100V | ≤3% | ≤6% | 1206 ≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤7.5% | 0603 ≥0.068μF; 0805 >0.1μF; 1206 ≥1μF; 1210 ≥2.2μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 0805 >0.22μF; 1210 ≥3.3μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V | ≤3% | ≤6% | 0201(50V); 0603 ≥0.047μF; 0805 ≥0.18μF; 1206 ≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% | 0201 ≥0.01μF; 1210 ≥3.3μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 0402 ≥0.012μF; 0603 >0.1μF; 0805 ≥1μF (0805/X7R >0.47μF); 1206 ≥2.2μF; 1210 ≥10μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤5% | ≤20% | 0603 ≥1μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤10% | 0201 ≥0.01μF (0201/X5R = 0.01μF); 0805 ≥1μF; 1210 ≥10μF* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤14% | 0603 ≥0.33μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤5% | ≤15% | 0201 ≥0.1μF (0201/X5R >0.01μF); 0603 ≥0.47μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% | 0402 ≥0.10μF (0402/X7R ≥0.056μF); 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF (1210/X5R ≥10μF)*; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 0402 ≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V | ≤15% | ≤10% | 0603 ≥0.15μF; 0805 ≥0.68μF; 1206 ≥2.2μF; 1210 ≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% | 0201 ≥0.01μF (0201/X7R ≥0.022μF); 0402 ≥0.033μF; 0603 >0.47μF; 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% | 0201 ≥0.012μF; 0402 ≥0.22μF; 0603 ≥0.33μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤7.5% | ≤15% | 0201 ≥0.1μF; 0402 ≥1μF (0402/X6S ≥0.47μF); 0603 ≥10μF; 0805 ≥4.7μF; 1206 ≥47μF; 1210 ≥100μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 0201 ≥0.1μF; 0402 ≥1μF; 0603/X5R ≥10μF; TT series; 01R5/X5R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤15% | ≤30% | 0201 ≥0.1μF; 0402 ≥1μF (0402/X6S ≥0.47μF); 0603 ≥10μF; 0805 ≥4.7μF; 1206 ≥47μF; 1210 ≥100μF; TT series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4V | ≤20% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectric</th> <th>Rated voltage</th> <th>Capacitance</th> </tr> </thead> <tbody> <tr> <td rowspan="2">0201</td> <td rowspan="2">X5R/X6S</td> <td>16V, 25V</td> <td>C=0.1μF</td> </tr> <tr> <td>16V</td> <td>C≥0.022μF</td> </tr> <tr> <td rowspan="3">0402</td> <td rowspan="2">X7R/X5R/ X6S</td> <td>50V</td> <td>C>0.01μF</td> </tr> <tr> <td>10~25V</td> <td>C≥0.22μF</td> </tr> <tr> <td>Y5V</td> <td>16V</td> <td>C≥0.47μF</td> </tr> <tr> <td rowspan="5">0603</td> <td rowspan="2">X7S</td> <td>50V~100V</td> <td>C>0.22μF</td> </tr> <tr> <td>50V</td> <td>C>0.1μF</td> </tr> <tr> <td rowspan="2">X7R</td> <td>25V</td> <td>C=1.0μF</td> </tr> <tr> <td>50V</td> <td>C≥1.0μF</td> </tr> <tr> <td>X5R/X7R/ X6S/X7S</td> <td>10V, 16V</td> <td>C≥1.0μF</td> </tr> <tr> <td>Y5V</td> <td>16V</td> <td>C≥2.2μF</td> </tr> <tr> <td rowspan="4">0805</td> <td rowspan="3">X5R/X7R/ X6S/X7S</td> <td>100V</td> <td>C≥0.47μF</td> </tr> <tr> <td>50V</td> <td>C≥0.68μF</td> </tr> <tr> <td>35V</td> <td>C≥2.2μF</td> </tr> <tr> <td>10~25V</td> <td>C≥4.7μF</td> </tr> <tr> <td>Y5V</td> <td>16V</td> <td>C≥4.7μF</td> </tr> <tr> <td rowspan="3">1206</td> <td rowspan="2">X7R</td> <td>100V</td> <td>C≥1.0μF</td> </tr> <tr> <td>50V</td> <td>C≥2.2μF</td> </tr> <tr> <td>X5R/X6S/ X7S</td> <td>100V</td> <td>C>1.0μF</td> </tr> <tr> <td rowspan="2">1210</td> <td rowspan="2">X5R/X7R/ X6S/X7S</td> <td>50V</td> <td>C=4.7μF</td> </tr> <tr> <td>50V~100V</td> <td>C≥2.2μF</td> </tr> <tr> <td>1825 2220 2225</td> <td>X7R</td> <td>100V~250V</td> <td>C≥1.0μF</td> </tr> </tbody> </table> | Size | Dielectric | Rated voltage | Capacitance | 0201 | X5R/X6S | 16V, 25V | C=0.1μF | 16V | C≥0.022μF | 0402 | X7R/X5R/ X6S | 50V | C>0.01μF | 10~25V | C≥0.22μF | Y5V | 16V | C≥0.47μF | 0603 | X7S | 50V~100V | C>0.22μF | 50V | C>0.1μF | X7R | 25V | C=1.0μF | 50V | C≥1.0μF | X5R/X7R/ X6S/X7S | 10V, 16V | C≥1.0μF | Y5V | 16V | C≥2.2μF | 0805 | X5R/X7R/ X6S/X7S | 100V | C≥0.47μF | 50V | C≥0.68μF | 35V | C≥2.2μF | 10~25V | C≥4.7μF | Y5V | 16V | C≥4.7μF | 1206 | X7R | 100V | C≥1.0μF | 50V | C≥2.2μF | X5R/X6S/ X7S | 100V | C>1.0μF | 1210 | X5R/X7R/ X6S/X7S | 50V | C=4.7μF | 50V~100V | C≥2.2μF | 1825 2220 2225 | X7R | 100V~250V | C≥1.0μF | <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th colspan="2">Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10%</td> <td>0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF</td> </tr> <tr> <td rowspan="2">35V</td> <td rowspan="2">≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td>≤20%</td> <td>1210 ≥6.8μF</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤7.5%</td> <td>≤10%</td> <td>0402 ≥0.047μF; 0603 ≥0.1μF; 0805 ≥0.33μF; 1206 ≥1μF; 1210 ≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0402 ≥0.068μF; 0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF</td> </tr> <tr> <td>≤12.5%</td> <td>0402 ≥0.068μF; 0603 ≥0.68μF</td> </tr> <tr> <td rowspan="2">16V (C<1.0μF)</td> <td rowspan="2">≤10%</td> <td>≤20%</td> <td>0402 ≥0.22μF</td> </tr> <tr> <td>≤12.5%</td> <td>0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF; 1210 ≥22μF; 1812 ≥47μF;</td> </tr> <tr> <td>16V (C≥1.0μF)</td> <td>≤12.5%</td> <td>≤20%</td> <td>0402 ≥0.47μF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402 ≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | ≥50V | ≤7.5% | ≤10% | 0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF | 35V | ≤10% | --- | --- | ≤20% | 1210 ≥6.8μF | 25V | ≤7.5% | ≤10% | 0402 ≥0.047μF; 0603 ≥0.1μF; 0805 ≥0.33μF; 1206 ≥1μF; 1210 ≥4.7μF | ≤15% | 0402 ≥0.068μF; 0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF | ≤12.5% | 0402 ≥0.068μF; 0603 ≥0.68μF | 16V (C<1.0μF) | ≤10% | ≤20% | 0402 ≥0.22μF | ≤12.5% | 0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF; 1210 ≥22μF; 1812 ≥47μF; | 16V (C≥1.0μF) | ≤12.5% | ≤20% | 0402 ≥0.47μF | 10V | ≤20% | ≤30% | 0402 ≥0.47μF | 6.3V | ≤30% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Size | Dielectric | Rated voltage | Capacitance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0201 | X5R/X6S | 16V, 25V | C=0.1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 16V | C≥0.022μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0402 | X7R/X5R/ X6S | 50V | C>0.01μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 10~25V | C≥0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Y5V | 16V | C≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0603 | X7S | 50V~100V | C>0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V | C>0.1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | X7R | 25V | C=1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | X5R/X7R/ X6S/X7S | 10V, 16V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Y5V | 16V | C≥2.2μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0805 | X5R/X7R/ X6S/X7S | 100V | C≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V | C≥0.68μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 35V | C≥2.2μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 10~25V | C≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Y5V | 16V | C≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1206 | X7R | 100V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V | C≥2.2μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | X5R/X6S/ X7S | 100V | C>1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1210 | X5R/X7R/ X6S/X7S | 50V | C=4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V~100V | C≥2.2μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1825 2220 2225 | X7R | 100V~250V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤7.5% | ≤10% | 0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤10% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 1210 ≥6.8μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤7.5% | ≤10% | 0402 ≥0.047μF; 0603 ≥0.1μF; 0805 ≥0.33μF; 1206 ≥1μF; 1210 ≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% | 0402 ≥0.068μF; 0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤12.5% | 0402 ≥0.068μF; 0603 ≥0.68μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C<1.0μF) | ≤10% | ≤20% | 0402 ≥0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤12.5% | 0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF; 1210 ≥22μF; 1812 ≥47μF; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C≥1.0μF) | ≤12.5% | ≤20% | 0402 ≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤20% | ≤30% | 0402 ≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤30% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <p>**1WV items must follow de-rating conditions.</p> <p>(2) 150% of rated voltage for below range.</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectric</th> <th>Rated voltage</th> <th>Capacitance</th> </tr> </thead> <tbody> <tr> <td rowspan="2">0201</td> <td rowspan="2">X5R/X6S</td> <td>16V, 25V</td> <td>C=0.1μF</td> </tr> <tr> <td>16V</td> <td>C≥0.022μF</td> </tr> <tr> <td rowspan="3">0402</td> <td rowspan="2">X7R/X5R/ X6S</td> <td>50V</td> <td>C>0.01μF</td> </tr> <tr> <td>10~25V</td> <td>C≥0.22μF</td> </tr> <tr> <td>Y5V</td> <td>16V</td> <td>C≥0.47μF</td> </tr> <tr> <td rowspan="5">0603</td> <td rowspan="2">X7S</td> <td>50V~100V</td> <td>C>0.22μF</td> </tr> <tr> <td>50V</td> <td>C>0.1μF</td> </tr> <tr> <td rowspan="2">X7R</td> <td>25V</td> <td>C=1.0μF</td> </tr> <tr> <td>50V</td> <td>C≥1.0μF</td> </tr> <tr> <td>X5R/X7R/ X6S/X7S</td> <td>10V, 16V</td> <td>C≥1.0μF</td> </tr> <tr> <td>Y5V</td> <td>16V</td> <td>C≥2.2μF</td> </tr> <tr> <td rowspan="4">0805</td> <td rowspan="3">X5R/X7R/ X6S/X7S</td> <td>100V</td> <td>C≥0.47μF</td> </tr> <tr> <td>50V</td> <td>C≥0.68μF</td> </tr> <tr> <td>35V</td> <td>C≥2.2μF</td> </tr> <tr> <td>10~25V</td> <td>C≥4.7μF</td> </tr> <tr> <td>Y5V</td> <td>16V</td> <td>C≥4.7μF</td> </tr> <tr> <td rowspan="3">1206</td> <td rowspan="2">X7R</td> <td>100V</td> <td>C≥1.0μF</td> </tr> <tr> <td>50V</td> <td>C≥2.2μF</td> </tr> <tr> <td>X5R/X6S/ X7S</td> <td>100V</td> <td>C>1.0μF</td> </tr> <tr> <td rowspan="2">1210</td> <td rowspan="2">X5R/X7R/ X6S/X7S</td> <td>50V</td> <td>C=4.7μF</td> </tr> <tr> <td>50V~100V</td> <td>C≥2.2μF</td> </tr> <tr> <td>1825 2220 2225</td> <td>X7R</td> <td>100V~250V</td> <td>C≥1.0μF</td> </tr> </tbody> </table> | Size | Dielectric | Rated voltage | Capacitance | 0201 | X5R/X6S | 16V, 25V | C=0.1μF | 16V | C≥0.022μF | 0402 | X7R/X5R/ X6S | 50V | C>0.01μF | 10~25V | C≥0.22μF | Y5V | 16V | C≥0.47μF | 0603 | X7S | 50V~100V | C>0.22μF | 50V | C>0.1μF | X7R | 25V | C=1.0μF | 50V | C≥1.0μF | X5R/X7R/ X6S/X7S | 10V, 16V | C≥1.0μF | Y5V | 16V | C≥2.2μF | 0805 | X5R/X7R/ X6S/X7S | 100V | C≥0.47μF | 50V | C≥0.68μF | 35V | C≥2.2μF | 10~25V | C≥4.7μF | Y5V | 16V | C≥4.7μF | 1206 | X7R | 100V | C≥1.0μF | 50V | C≥2.2μF | X5R/X6S/ X7S | 100V | C>1.0μF | 1210 | X5R/X7R/ X6S/X7S | 50V | C=4.7μF | 50V~100V | C≥2.2μF | 1825 2220 2225 | X7R | 100V~250V | C≥1.0μF | <p>Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. ≤</th> <th colspan="2">Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10%</td> <td>0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF</td> </tr> <tr> <td rowspan="2">35V</td> <td rowspan="2">≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td>≤20%</td> <td>1210 ≥6.8μF</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤7.5%</td> <td>≤10%</td> <td>0402 ≥0.047μF; 0603 ≥0.1μF; 0805 ≥0.33μF; 1206 ≥1μF; 1210 ≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0402 ≥0.068μF; 0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF</td> </tr> <tr> <td>≤12.5%</td> <td>0402 ≥0.068μF; 0603 ≥0.68μF</td> </tr> <tr> <td rowspan="2">16V (C<1.0μF)</td> <td rowspan="2">≤10%</td> <td>≤20%</td> <td>0402 ≥0.22μF</td> </tr> <tr> <td>≤12.5%</td> <td>0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF; 1210 ≥22μF; 1812 ≥47μF;</td> </tr> <tr> <td>16V (C≥1.0μF)</td> <td>≤12.5%</td> <td>≤20%</td> <td>0402 ≥0.47μF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402 ≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> | Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | ≥50V | ≤7.5% | ≤10% | 0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF | 35V | ≤10% | --- | --- | ≤20% | 1210 ≥6.8μF | 25V | ≤7.5% | ≤10% | 0402 ≥0.047μF; 0603 ≥0.1μF; 0805 ≥0.33μF; 1206 ≥1μF; 1210 ≥4.7μF | ≤15% | 0402 ≥0.068μF; 0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF | ≤12.5% | 0402 ≥0.068μF; 0603 ≥0.68μF | 16V (C<1.0μF) | ≤10% | ≤20% | 0402 ≥0.22μF | ≤12.5% | 0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF; 1210 ≥22μF; 1812 ≥47μF; | 16V (C≥1.0μF) | ≤12.5% | ≤20% | 0402 ≥0.47μF | 10V | ≤20% | ≤30% | 0402 ≥0.47μF | 6.3V | ≤30% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Size | Dielectric | Rated voltage | Capacitance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0201 | X5R/X6S | 16V, 25V | C=0.1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 16V | C≥0.022μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0402 | X7R/X5R/ X6S | 50V | C>0.01μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 10~25V | C≥0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Y5V | 16V | C≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0603 | X7S | 50V~100V | C>0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V | C>0.1μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | X7R | 25V | C=1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | X5R/X7R/ X6S/X7S | 10V, 16V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Y5V | 16V | C≥2.2μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0805 | X5R/X7R/ X6S/X7S | 100V | C≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V | C≥0.68μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 35V | C≥2.2μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 10~25V | C≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Y5V | 16V | C≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1206 | X7R | 100V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V | C≥2.2μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | X5R/X6S/ X7S | 100V | C>1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1210 | X5R/X7R/ X6S/X7S | 50V | C=4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50V~100V | C≥2.2μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1825 2220 2225 | X7R | 100V~250V | C≥1.0μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated vol. | D.F. ≤ | Exception of D.F. ≤ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≥50V | ≤7.5% | ≤10% | 0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V | ≤10% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤20% | 1210 ≥6.8μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V | ≤7.5% | ≤10% | 0402 ≥0.047μF; 0603 ≥0.1μF; 0805 ≥0.33μF; 1206 ≥1μF; 1210 ≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤15% | 0402 ≥0.068μF; 0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤12.5% | 0402 ≥0.068μF; 0603 ≥0.68μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C<1.0μF) | ≤10% | ≤20% | 0402 ≥0.22μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ≤12.5% | 0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF; 1210 ≥22μF; 1812 ≥47μF; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V (C≥1.0μF) | ≤12.5% | ≤20% | 0402 ≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V | ≤20% | ≤30% | 0402 ≥0.47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V | ≤30% | --- | --- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <p>(3) ≤6.3V or C ≥10μF :150% of rated voltage. (4) 10V ≤ Ur < 500V: 200% of rated voltage. (5) 500V: 150% of rated voltage. (6) Ur ≥ 630V: 120% of rated voltage * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * De-rating conditions:</p> | <p>* I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X5R, X6S, X7S, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: All X7R; 1210 ≥3.3μF</td> <td rowspan="7">1GΩ or RxC ≥ 10 Ω-F whichever is smaller.</td> </tr> <tr> <td>50V: 0402 >0.01μF; 0603 ≥1μF; 0805 ≥1μF; 1206 ≥4.7μF; 1210 ≥4.7μF</td> </tr> <tr> <td>35V: 0603 ≥1μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥10μF</td> </tr> <tr> <td>25V: 0201 ≥0.1μF; 0402 ≥0.22μF; 0603 ≥2.2μF; 0805 ≥2.2μF; 1206 ≥10μF; 1210 ≥10μF</td> </tr> <tr> <td>16V: 0201 ≥0.1μF; 0402 ≥0.22μF; 0603 ≥1μF; 0805 ≥2.2μF; 1206 ≥10μF; 1210 ≥47μF</td> </tr> <tr> <td>10V: 0201 ≥47nF; 0402 ≥0.47μF; 0603 ≥0.47μF; 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥47μF</td> </tr> <tr> <td>6.3V ; 4V ; TT series ; All X6S/X7S items; Size ≥1812</td> </tr> </tbody> </table> | Rated voltage | Insulation Resistance | 100V: All X7R; 1210 ≥3.3μF | 1GΩ or RxC ≥ 10 Ω-F whichever is smaller. | 50V: 0402 >0.01μF; 0603 ≥1μF; 0805 ≥1μF; 1206 ≥4.7μF; 1210 ≥4.7μF | 35V: 0603 ≥1μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥10μF | 25V: 0201 ≥0.1μF; 0402 ≥0.22μF; 0603 ≥2.2μF; 0805 ≥2.2μF; 1206 ≥10μF; 1210 ≥10μF | 16V: 0201 ≥0.1μF; 0402 ≥0.22μF; 0603 ≥1μF; 0805 ≥2.2μF; 1206 ≥10μF; 1210 ≥47μF | 10V: 0201 ≥47nF; 0402 ≥0.47μF; 0603 ≥0.47μF; 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥47μF | 6.3V ; 4V ; TT series ; All X6S/X7S items; Size ≥1812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated voltage | Insulation Resistance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100V: All X7R; 1210 ≥3.3μF | 1GΩ or RxC ≥ 10 Ω-F whichever is smaller. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50V: 0402 >0.01μF; 0603 ≥1μF; 0805 ≥1μF; 1206 ≥4.7μF; 1210 ≥4.7μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35V: 0603 ≥1μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25V: 0201 ≥0.1μF; 0402 ≥0.22μF; 0603 ≥2.2μF; 0805 ≥2.2μF; 1206 ≥10μF; 1210 ≥10μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16V: 0201 ≥0.1μF; 0402 ≥0.22μF; 0603 ≥1μF; 0805 ≥2.2μF; 1206 ≥10μF; 1210 ≥47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10V: 0201 ≥47nF; 0402 ≥0.47μF; 0603 ≥0.47μF; 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥47μF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.3V ; 4V ; TT series ; All X6S/X7S items; Size ≥1812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

APPENDICES

■ Tape & reel dimensions

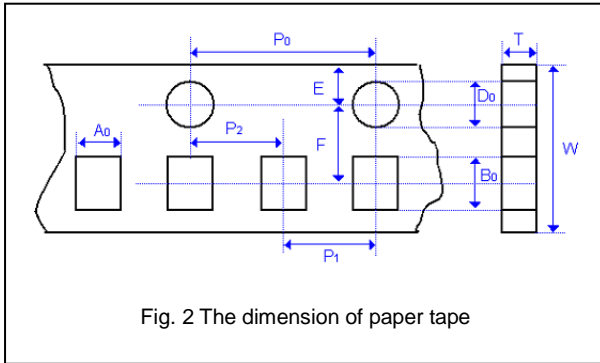


Fig. 2 The dimension of paper tape

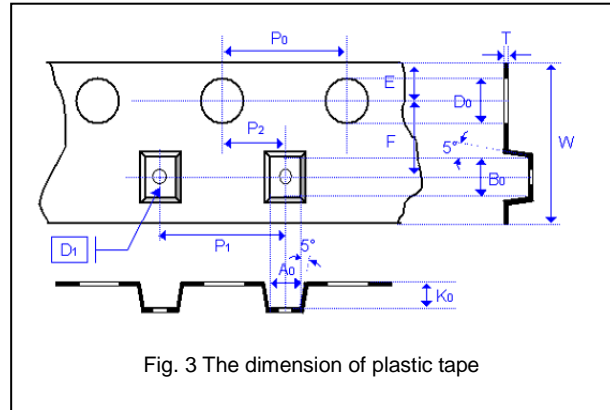


Fig. 3 The dimension of plastic tape

| Size | 0402 | 0603 | 0805 | | | 1206 | | | 1210 | 1808 | 1812 | 1825 | 2220 | | 2225 | | | | |
|-------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Thickness | N,E | S,X | A,H | B,T | D,I | B,T | C,J,D | G,P | C,D,G,K | M | D,F,G,K | D,F,G,K | M,U | K | M,U | K | M,U | K | M,U |
| A ₀ | 0.70 +/-0.20 | 1.05 +/-0.30 | 1.50 +/-0.20 | 1.50 +/-0.20 | < 1.80 | 1.90 +/-0.50 | < 2.00 | < 2.30 | < 3.05 | < 3.20 | < 2.50 | < 3.90 | < 3.90 | < 6.80 | < 6.80 | < 5.80 | < 5.80 | < 6.80 | < 6.80 |
| B ₀ | 1.20 +/-0.20 | 1.80 +/-0.30 | 2.30 +/-0.20 | 2.30 +/-0.20 | < 2.70 | 3.50 +/-0.50 | < 3.70 | < 4.00 | < 3.80 | < 4.00 | < 5.30 | < 5.30 | < 5.30 | < 5.30 | < 5.30 | < 6.50 | < 6.50 | < 6.50 | < 6.50 |
| T | ≤ 0.80 | ≤ 1.20 | ≤ 1.15 | ≤ 1.20 | 0.23 +/-0.1 | ≤ 1.20 | 0.23 +/-0.1 | 0.23 +/-0.1 | 0.23 +/-0.1 | 0.23 +/-0.1 | 0.25 +/-0.1 | 0.25 +/-0.1 | 0.25 +/-0.1 | 0.30 +/-0.1 | 0.30 +/-0.1 | 0.30 +/-0.1 | 0.30 +/-0.1 | 0.30 +/-0.1 | 0.30 +/-0.1 |
| K ₀ | - | - | - | - | < 2.50 | - | < 2.50 | < 2.50 | < 2.50 | < 3.20 | < 2.50 | < 2.50 | < 3.50 | < 2.50 | < 3.50 | < 2.50 | < 3.50 | < 2.50 | < 3.50 |
| W | 8.00 +/-0.30 | 8.00 +/-0.30 | 8.00 +/-0.30 | 8.00 +/-0.30 | 8.00 +/-0.30 | 8.00 +/-0.30 | 8.00 +/-0.30 | 8.00 +/-0.30 | 8.00 +/-0.30 | 8.00 +/-0.30 | 12.00 +/-0.30 | 12.00 +/-0.30 | 12.00 +/-0.30 | 12.00 +/-0.30 | 12.00 +/-0.30 | 12.00 +/-0.30 | 12.00 +/-0.30 | 12.00 +/-0.30 | 12.00 +/-0.30 |
| P ₀ | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 |
| 10xP ₀ | 40.00 +/-0.10 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 | 40.00 +/-0.20 |
| P ₁ | 2.00 +/-0.05 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 4.00 +/-0.10 | 8.00 +/-0.10 | 8.00 +/-0.10 | 8.00 +/-0.10 | 8.00 +/-0.10 | 8.00 +/-0.10 | 8.00 +/-0.10 | 8.00 +/-0.10 |
| P ₂ | 2.00 +/-0.05 | 2.00 +/-0.05 | 2.00 +/-0.05 | 2.00 +/-0.05 | 2.00 +/-0.05 | 2.00 +/-0.05 | 2.00 +/-0.05 | 2.00 +/-0.05 | 2.00 +/-0.05 | 2.00 +/-0.05 | 2.00 +/-0.05 | 2.00 +/-0.10 | 2.00 +/-0.10 | 2.00 +/-0.10 | 2.00 +/-0.10 | 2.00 +/-0.10 | 2.00 +/-0.10 | 2.00 +/-0.10 | 2.00 +/-0.10 |
| D ₀ | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 | 1.50 +0.1/-0 |
| D ₁ | - | - | - | - | 1.00 +/-0.10 | - | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 | 1.00 +/-0.10 |
| E | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 | 1.75 +/-0.10 |
| F | 3.50 +/-0.05 | 3.50 +/-0.05 | 3.50 +/-0.05 | 3.50 +/-0.05 | 3.50 +/-0.05 | 3.50 +/-0.05 | 3.50 +/-0.05 | 3.50 +/-0.05 | 3.50 +/-0.05 | 3.50 +/-0.05 | 5.50 +/-0.10 | 5.50 +/-0.10 | 5.50 +/-0.10 | 5.50 +/-0.05 | 5.50 +/-0.05 | 5.50 +/-0.05 | 5.50 +/-0.05 | 5.50 +/-0.05 | 5.50 +/-0.05 |

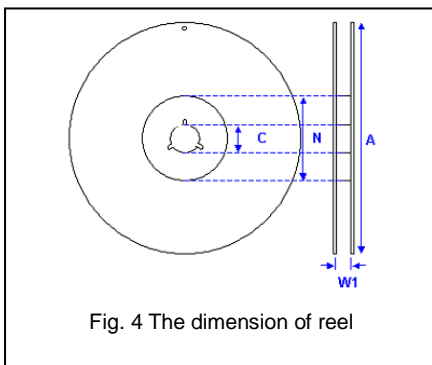


Fig. 4 The dimension of reel

| Size | 0402, 0603, 0805, 1206, 1210 | | | 1808 to 2225 |
|----------------|------------------------------|-----------|-----------|--------------|
| Reel size | 7" | 10" | 13" | 7" |
| C | 13.0±0.5 | 13.0±0.5 | 13.0±0.5 | 13.0±0.5 |
| W ₁ | 10.0±1.5 | 10.0±1.5 | 10.0±1.5 | 12.4±2.0/-0 |
| A | 178.0±2.0 | 250.0±2.0 | 330.0±2.0 | 178.0±2.0 |
| N | 60.0+1.0/-0 | 50 min | 50 min | 60.0+1.0/-0 |

▣ Constructions

| No. | Name | NPO | X7R, X5R, Y5V |
|-----|------------------|--------------------------|--------------------------|
| ① | Ceramic material | CaZrO ₃ based | BaTiO ₃ based |
| ② | Inner electrode | Ni | |
| ③ | Termination | Inner layer | Cu + Ag Polymer |
| ④ | | Middle layer | Ni |
| ⑤ | | Outer layer | Sn |

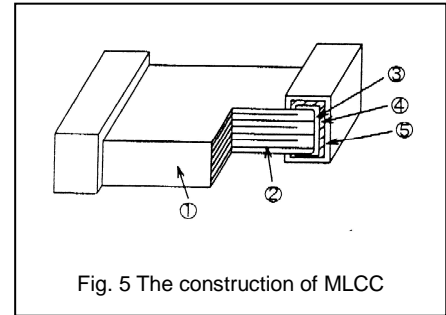


Fig. 5 The construction of MLCC

▣ Storage and handling conditions

- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions; MSL Level 1.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

▣ Caution for SOFT TERMINATION Products

Since the middle layer of the terminal electrode contains Ag (silver), when chip capacitors on printed circuit board (PCB), it should be protected by moisture proof-sealing to prevent electromigration of Ag under high temperature, high humidity and failure due to corrosive gas.

▣ Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N₂ within oven are recommended.

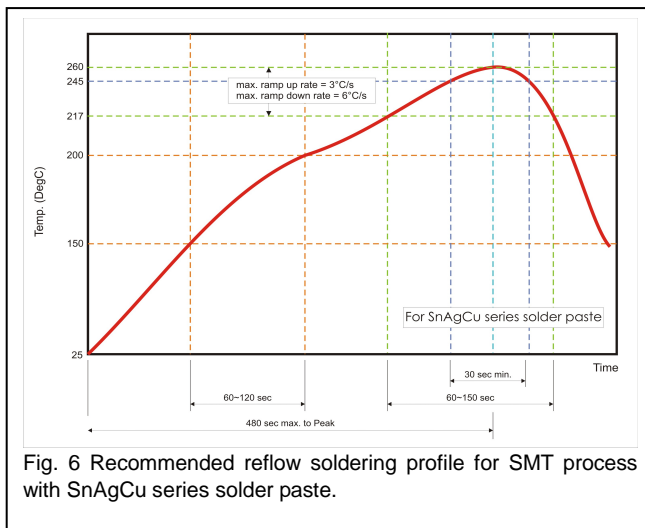


Fig. 6 Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

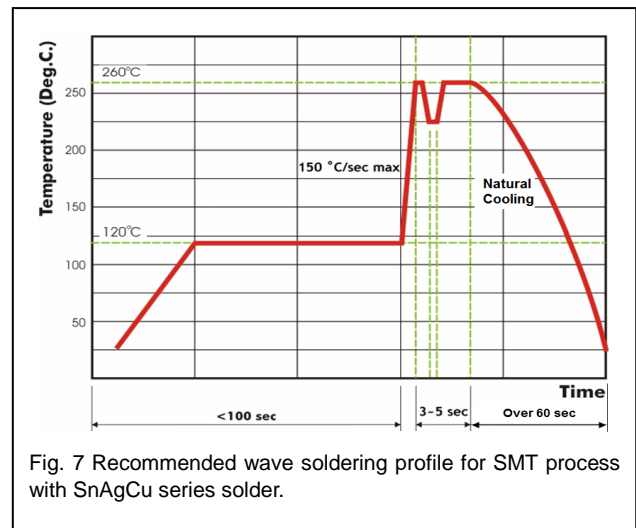


Fig. 7 Recommended wave soldering profile for SMT process with SnAgCu series solder.